




Dual NPN Small Signal Transistor

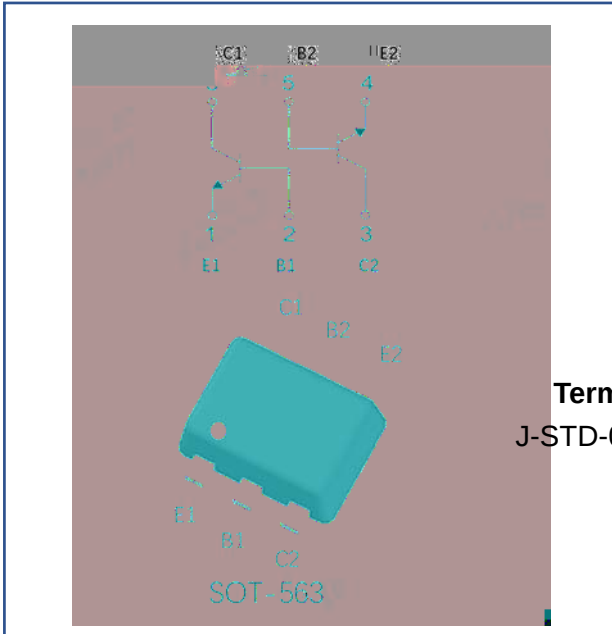

Features

- Moisture sensitivity level 1
- Halogen free and RoHS compliant
- Surface mount package ideally suited for automatic Insertion

Application ° !

S ° °

Terminals Tin plated leads, solderable per
J-STD-002 and JESD22-B102

■ Maximum Ratings ($T_a=25$ Unless otherwise specified)

Item	Symbol	Unit	Conditions	Value
Device marking code				K4

Emitter-base voltage	V_{EBO}	V	$I_E=10\mu A, I_C=0$	6
Collector current	I_C	mA		100
Power dissipation	P_D	mW		150
Junction temperature	T_J			-55 to +150
Storage temperature	T_{STG}			-55 to +150



BC847BV

RoHS
COMPLIANT

Item	Symbol	Unit	Conditions	Min	Typ	Max
Collector-base breakdown voltage	$V_{(BR)CBO}$	V	$I_C=10\mu A, I_E=0$	50		
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	V	$I_C=10mA, I_B=0$	45		
Emitter-base breakdown voltage	$V_{(BR)EBO}$	V	$I_E=10\mu A, I_C=0$	6		
Collector cut-off current	I_{CBO}	nA	$V_{CB}=30V, I_B=0$			15
Emitter-base cutoff current	I_{EBO}	nA	$V_{EB}=5V, I_C=0$			100
DC current gain	h_{FE}		$V_{CE}=5V, I_C=2mA$	200		450
Collector-emitter saturation voltage	$V_{CE(sat)1}$	V	$I_C=10mA, I_B=0.5mA$			0.1
	$V_{CE(sat)2}$	V	$I_C=100mA, I_B=5mA$			0.3
Base-emitter saturation voltage	$V_{BE(sat)1}$	V	$I_C=10mA, I_B=0.5mA$		0.7	
	$V_{BE(sat)2}$	V	$I_C=100mA, I_B=5mA$		0.9	
Base-emitter voltage	V_{BE1}	V	$V_{CE}=5V, I_C=2mA$	0.58	0.66	0.7
	V_{BE2}	V	$V_{CE}=5V, I_C=10mA$			0.77
Transition frequency	f_T	MHz	$V_{CE}=5V, I_C=10mA, f=100MHz$	100		





BC847BV

RoHS

COMPLIANT

Preferred P/N	Packing code	Unit weight(g)	Minimum package(pcs)	Inner box quantity(pcs)	Outer carton
---------------	--------------	----------------	----------------------	-------------------------	--------------



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function, or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.