



2-Line, Bi-directional, Transient Voltage Suppressor

Features

- Transient protection for each line according to IEC61000-4-2(ESD): $\pm 30\text{kV}$ contact, $\pm 30\text{kV}$ air IEC61000-4-5:9A($t_p=8/20\mu\text{s}$)
- Low leakage current
- Ultra low clamping voltage
- RoHS Compliant


Applications


- Cellular Handsets and Accessories
- Notebooks and Handhelds
- Portable Instrumentation
- Set Top Boxes, Cable Modems, and other consumer electronics



■ Characteristics (Typical)

Fig.1 8/20us Waveform Per iec6100-4-5

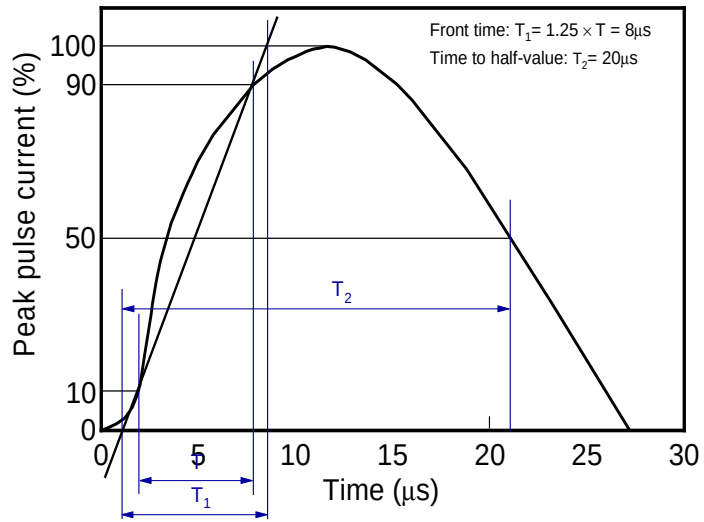

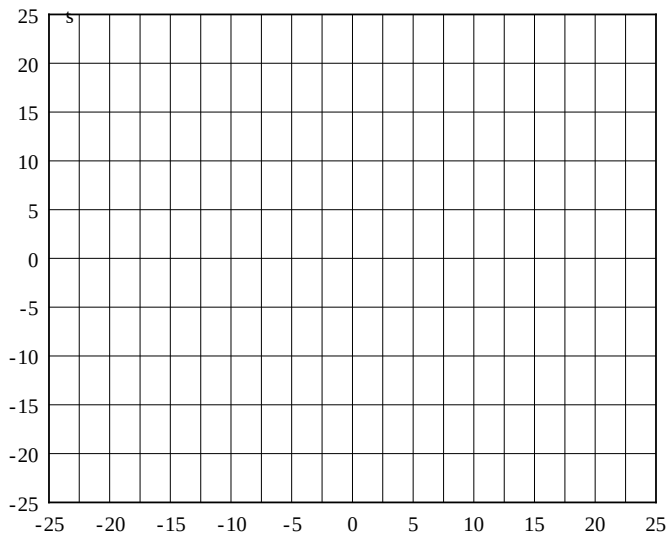

■ Outline Dimensions

