


1-Line, Bi-directional, Transient Voltage Suppressor




Features

Applications

Mechanical Data

Definitions of electrical characteristics

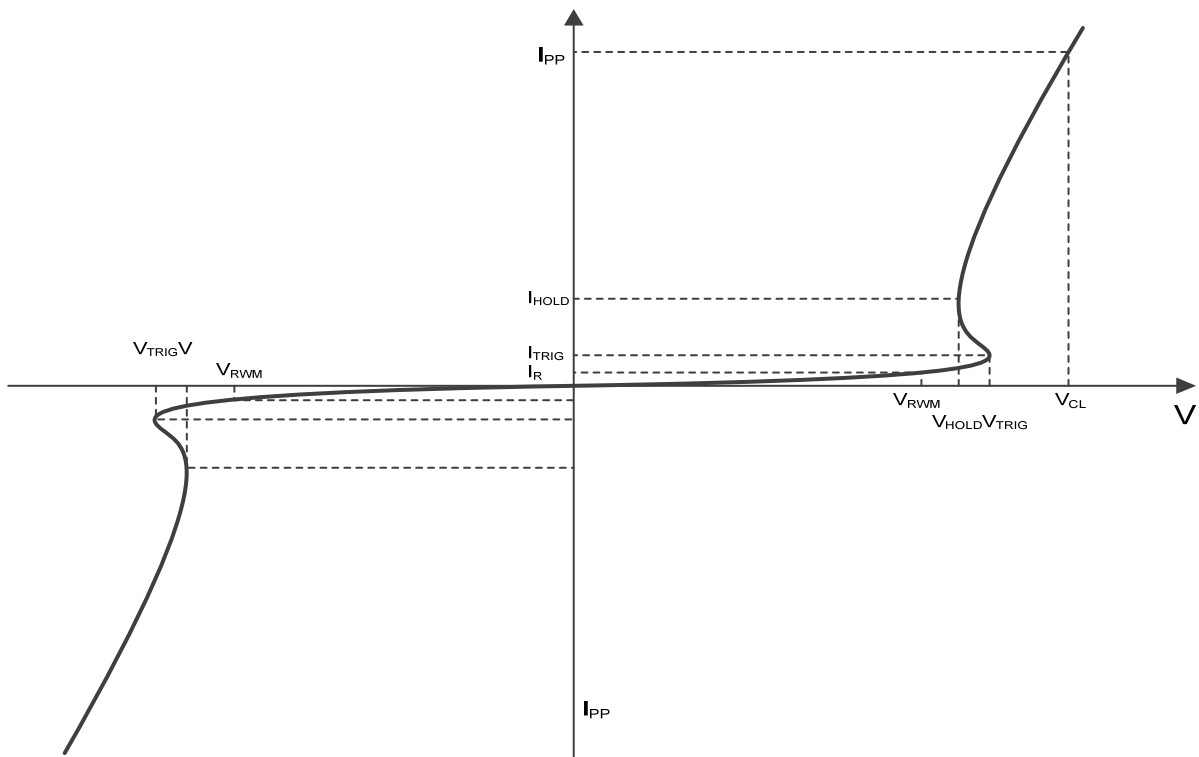



ESD3V3D3B

Maximum Ratings

PARAMETER	SYMBOL	Rating	UNIT

Electrical Characteristics $T_a=25$ Unless otherwise specified

PARAMETER	Symbol	UNIT	Conditions	Min	Typ	Max
1)						
1)						
2)						
3)						


Ordering Information (Example)

PREFERED P/N	PACKING CODE	UNIT WEIGHT(mg)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE




ESD3V3D3B


ESD damping
(+8kV contact discharge per IEC61000-4-2)

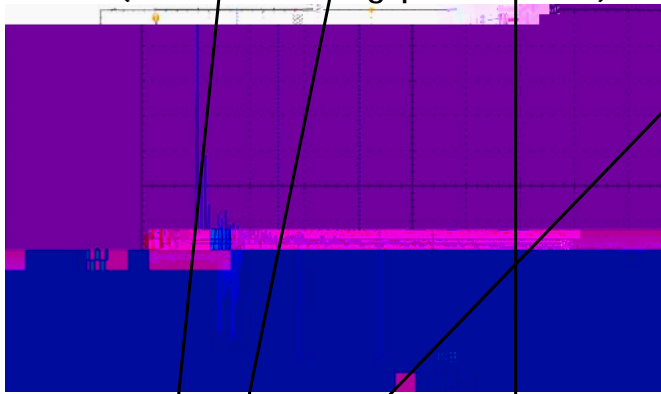

ESD damping
(-8kV contact discharge per IEC61000-4-2)

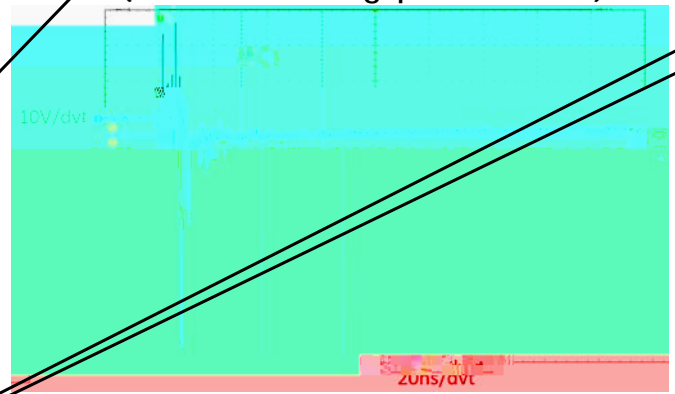

TLP Measurement

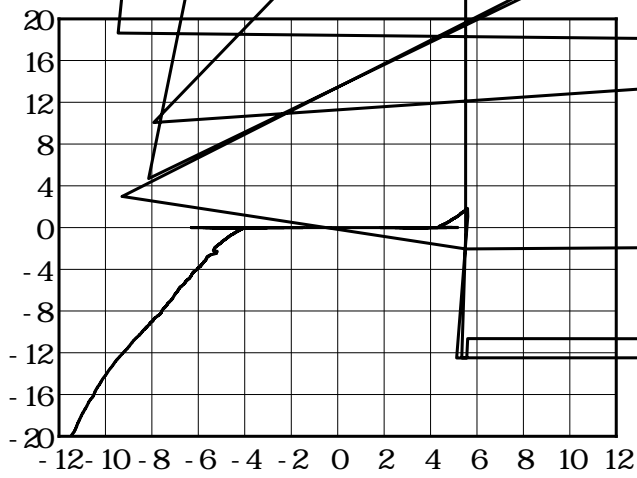

Outline Dimensions

