



- ✕ RoHS Compliant
- ✕ Up to 4 lines protects
- ✕ Low clamping Voltage

ESDSt-G0504P5A

- ✕ Ultra low leakage

4-Line, Uni-directional, Ultra-low Capacitance,

Applications


- USB 2.0/3.0
HDMI 1.3, HDMI 1.4 and HDMI 2.0
- SATA and eSATA interface
- DVI
- IEEE 1394
- Portable Electronics and Notebooks
- Ethernet port: 10/100/1000 Mbs/s
- Desktop and Notebooks PCS


Mechanical Data

- Package: DFN2510-10 (2.5×1.0×0.5mm)
- Terminals: Tin plated leads, solderabl per
J-STD-002 and JESD22-B102
- Marking Informa



■ Characteristics (Typical)

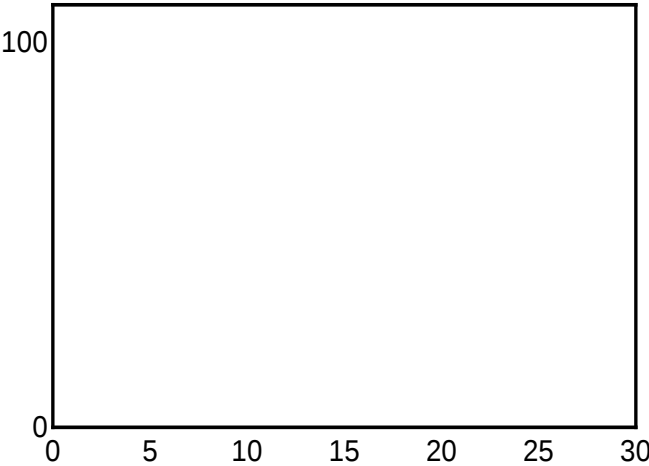

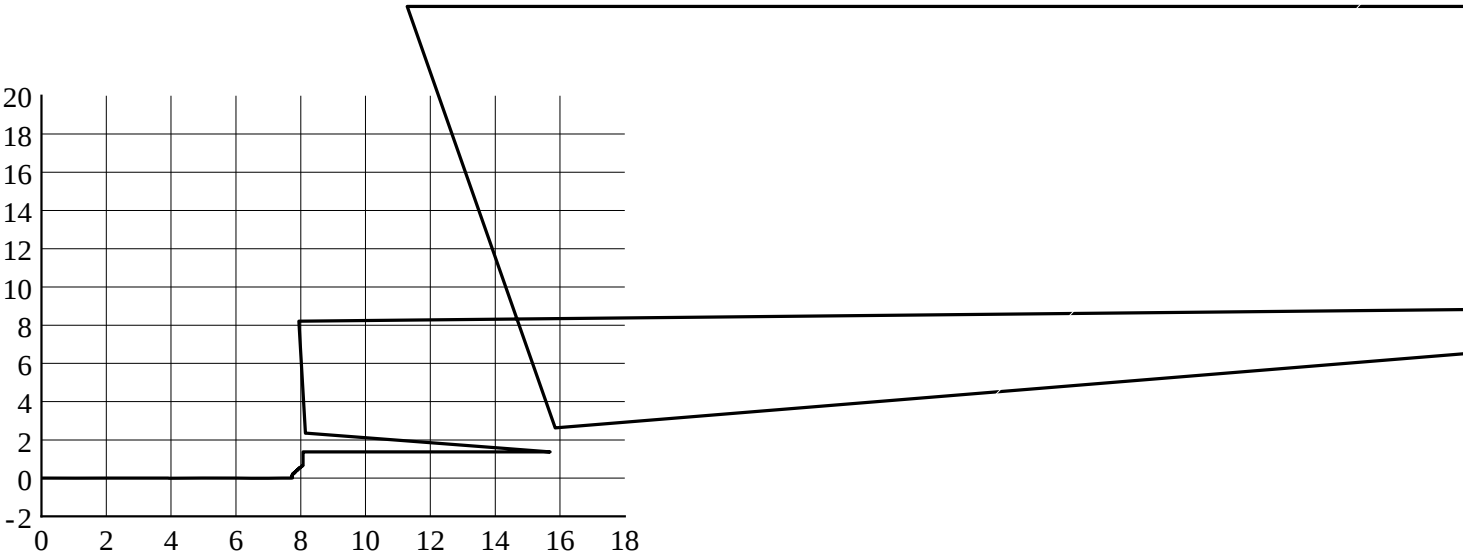



■ Outline Dimensions

