


4-Line Uni-directional , Ultra-low Capacitance Transient Voltage Suppressor

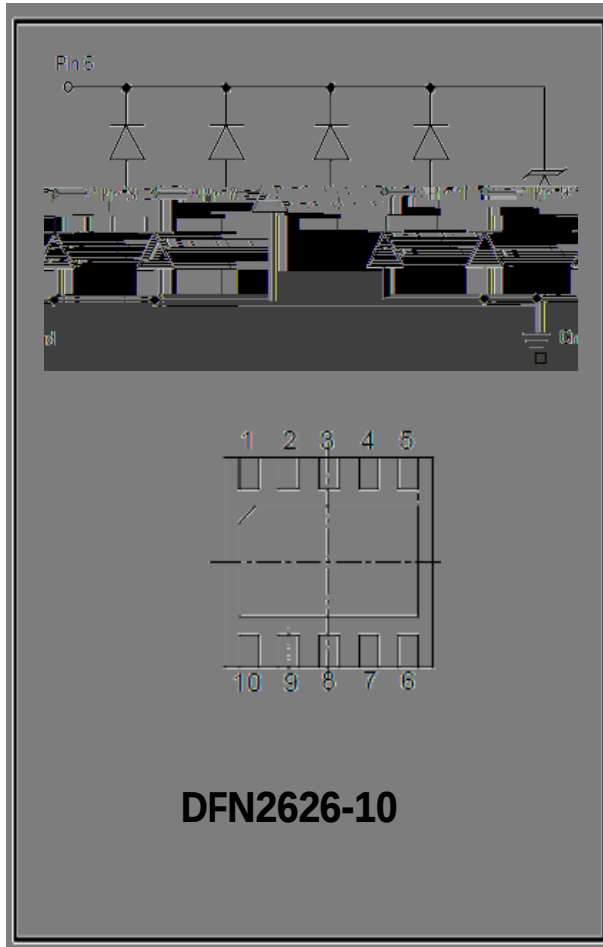

Features

- Ultra small package
- Stand-off voltage: 3.3V
- Transient protection for each line according to
IEC61000-4-2(ESD): $\pm 15\text{kV}$ (contact)
IEC61000-4-5(surge): 24A (8/20 μs)
- Low clamping voltage
- RoHS Compliant

Applications


- Analog Video
- RJ-45 Connectors
 - T1/E1 Secondary Protection
 - T3/E3 Secondary Protection
- 10/100/1000 Ethernet

Mechanical Characteristics

- Package: DFN2626-10L
- Case Material: "Green" Molding Compound.
- Moisture Sensitivity: Level 3 per J-STD-020
- Marking Information: See Below



Definitions of electrical characteristics

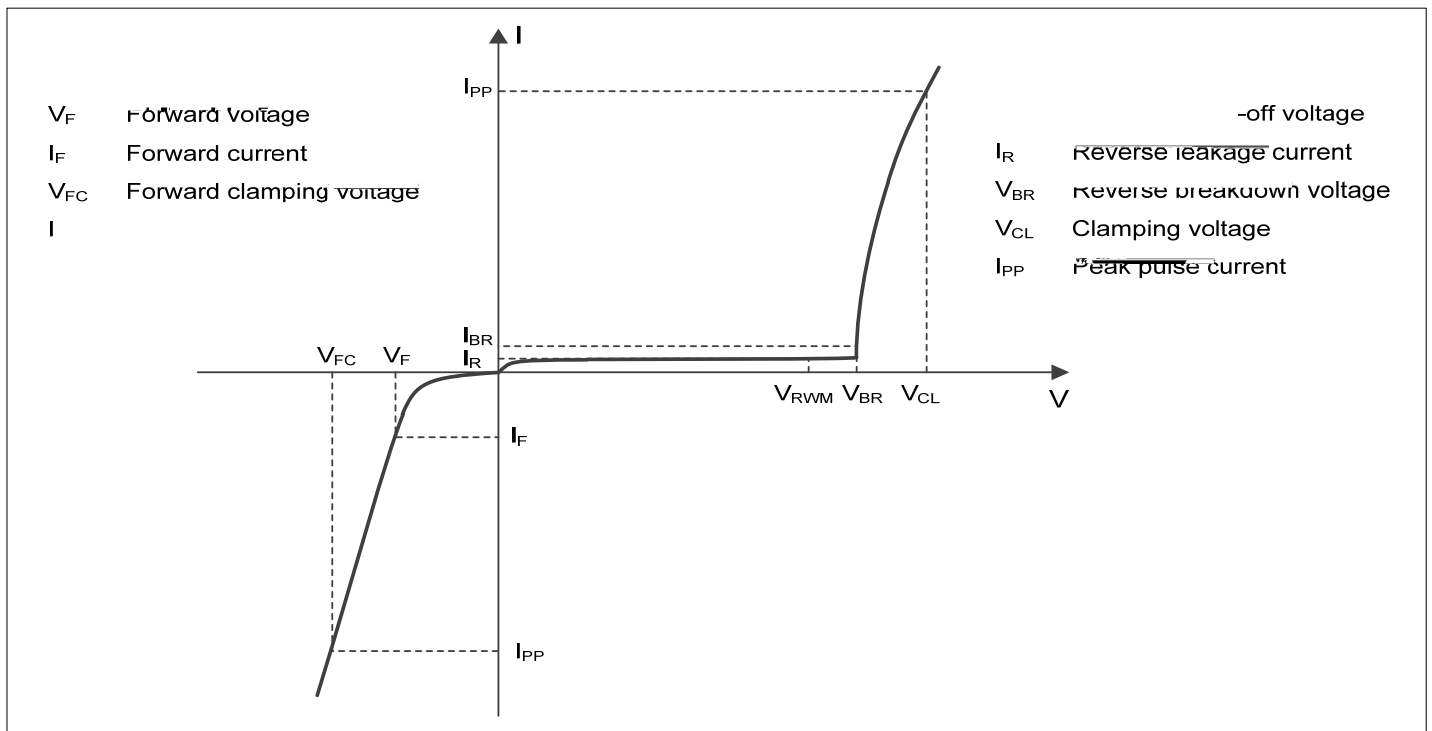



ESDSL3304P8

■Absolute Maximum Ratings (Ta=25°C unless otherwise specified)

PARAMETER	SYMBOL	LIMITS	UNIT
Peak pulse power ($t_p = 8/20\mu s$)	P_{pk}	450	W
Peak pulse current ($t_p = 8/20\mu s$)	I_{PP}	24	A
ESD according to IEC61000-4-2 air discharge	V_{ESD}	± 25	kV
Operating Temperature Range	T_J	-55~125	
Storage Temperature Range	T_{STG}	-55~150	

■Electrical Characteristics Ta=25 Unless otherwise specified

PARAMETER	Symbol	UNIT	Conditions	Min	Typ	Max
Reverse maximum working voltage	V_{RWM}	V				3.3
Reverse leakage current	I_R	μA	$V_{RWM} = 3.3V$			0.5
Threshold voltage	V_{PT}	V	$I_{PT} = 2\mu A$	3.5		
Source-Sink current	V_{SB}	V	$I_{SB} = 50mA$	2.8		
Clamping voltage ¹⁾	V_{CL}	V	$I_{PP} = 1A$, (8 x 20 μs pulse), any I/O to GND			5.5
Clamping voltage ¹⁾	V_{CL}	V	$I_{PP} = 24A$, (8 x 20 μs pulse), any I/O to GND			18.5
Junction capacitance	C_J	pF	$V_R = 0V$, $f = 1MHz$ between I/O pins		2	
Junction capacitance	C_J	pF	$V_R = 0V$, $f = 1MHz$ any I/O to GND		3.2	5

Notes:

(1). Non-repetitive current pulse, according to IEC61000-4-5. (8/20 μs current waveform).

■Ordering Information (Example)

D P/N	PACKING	UNIT WEIGHT	PACK	Ep	Im	Tip	An's
-------	---------	-------------	------	----	----	-----	------



ESDSL3304P8

■ Typical Performance Characteristics ($T_A=25^\circ\text{C}$ unless otherwise Specified)

Fig.1 8/20 μs waveform per IEC61000-4-5

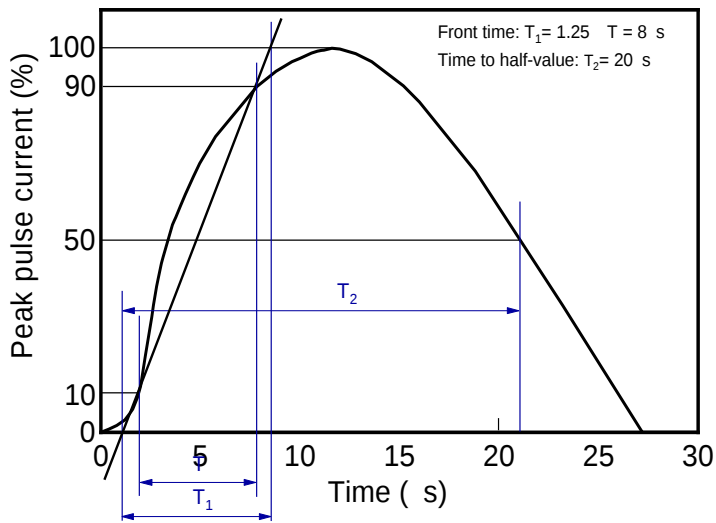


Fig.2 Contact discharge current waveform per IEC61000-4-2

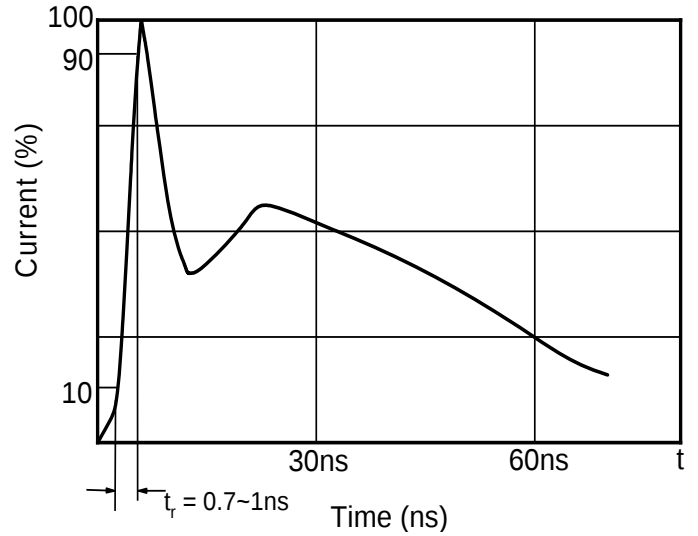


Fig.3 Clamping voltage vs. Peak pulse current

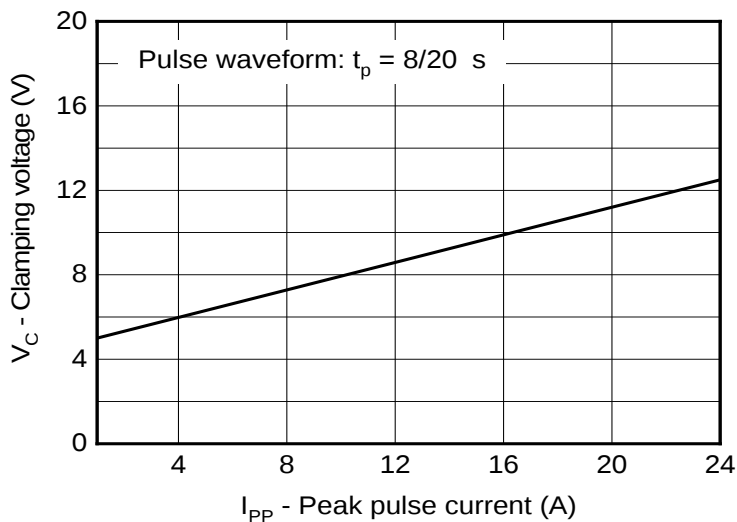


Fig.4. Capacitance vs. Reverse voltage

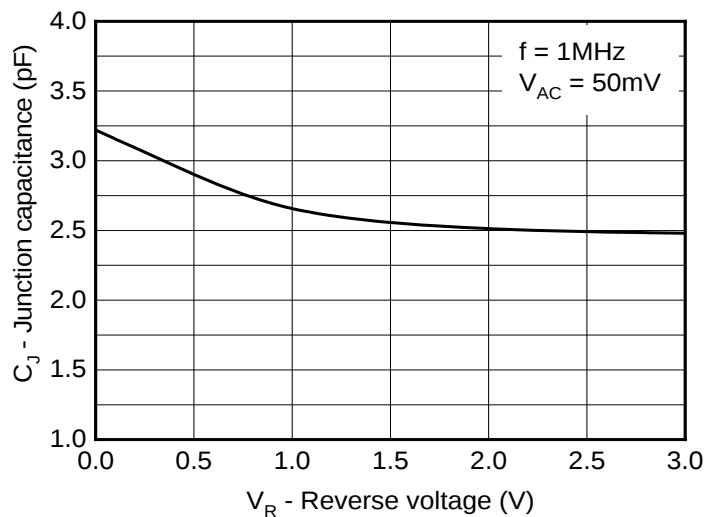


Fig.5 Non-repetitive peak pulse power vs. Pulse time


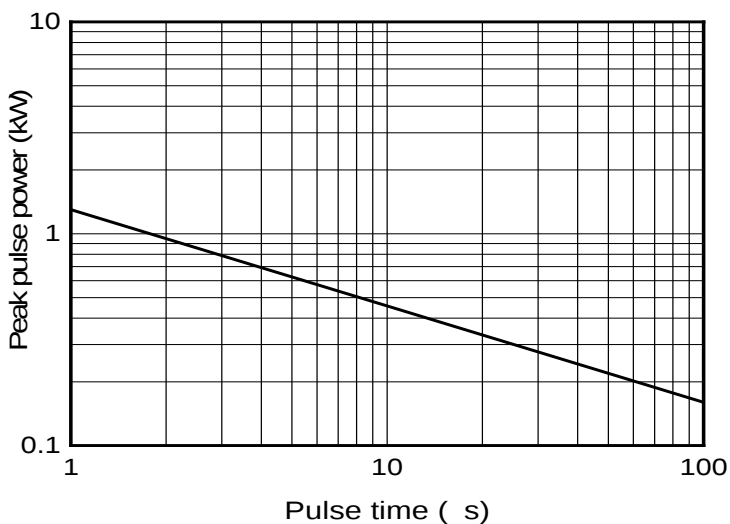


Fig.6 Power derating vs. Ambient temperature





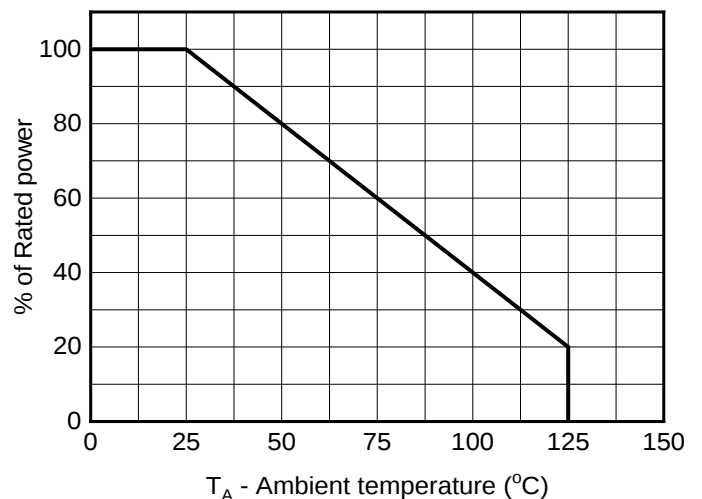

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.