



- V_{RWM} Reverse stand-off voltage
- I_R Reverse leakage current
- V_{BR} Reverse breakdown voltage
- V_{CL} Clamping voltage
- I_{PP} Peak pulse current




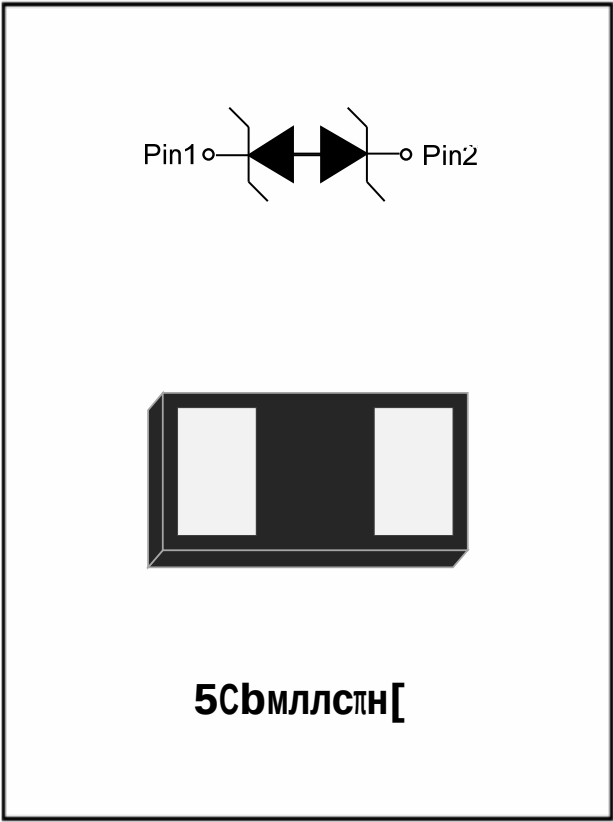

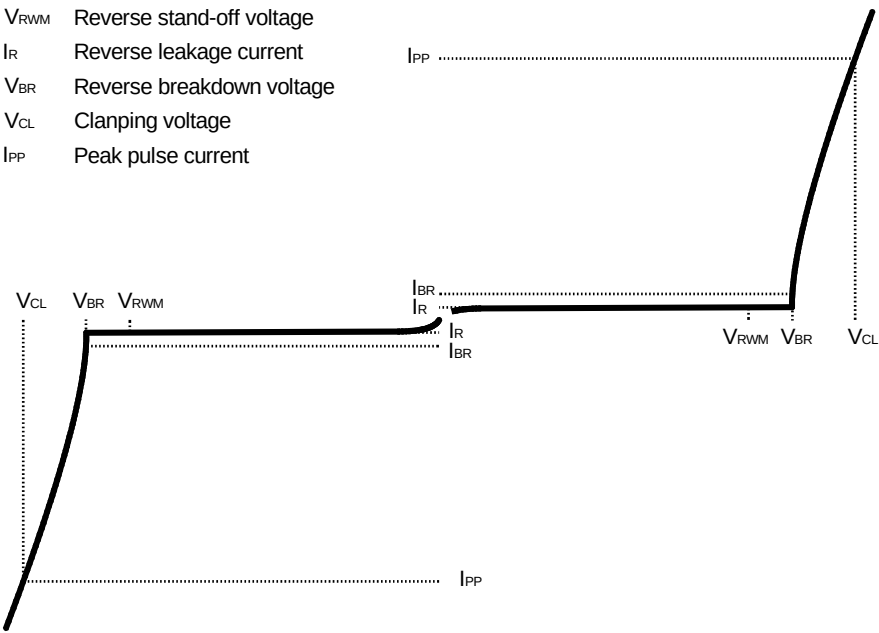

■ Characteristics (Typical)

Fig.1 8/20μs waveform per IEC61000-4-5

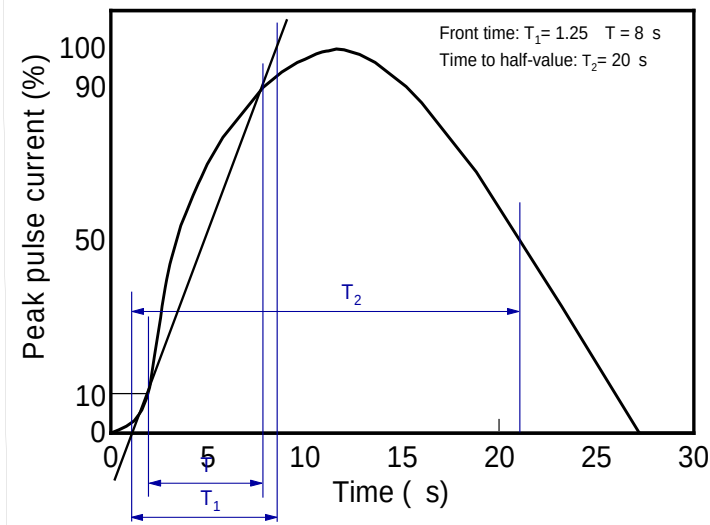

ESDSLC5V5LBA1



ESDSLC5V5LBA1

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves m 1