



RoHS
COMPLIANT




Repetitive Peak Reverse Voltage	V_{RRM}	$T_{vj}=25$	1200	V
Continuous DC Forward Current	I_F		200	A
Repetitive Peak Forward Current	I_{FRM}	$t_p=1ms$	400	A

Forward Voltage	V _F	I _F =200A, T _{vj} =25		2.00	2.80	V
		I _F =200A, T _{vj} =125		1.85		
		I _F =200A, T _{vj} =150		1.80		
Recovered Charge	Q _{rr}	I _F =200A V _R =600V -di _F /dt =2400A/us[F]TJETQ EMC T _{vj}				




RoHS
COMPLIANT





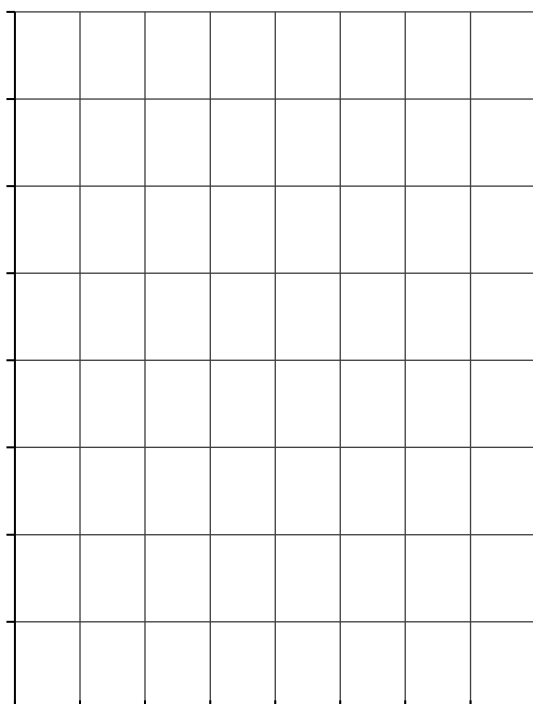



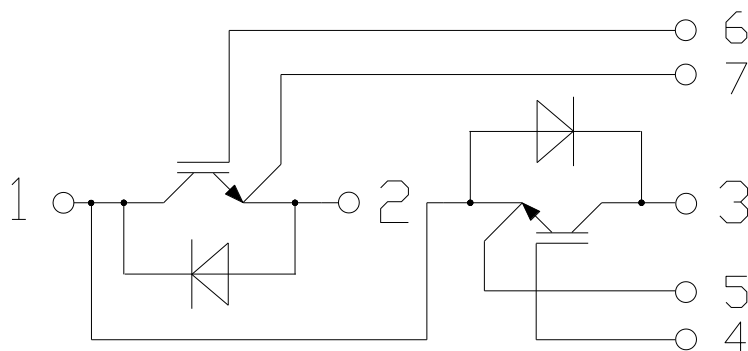

Package Outline Information

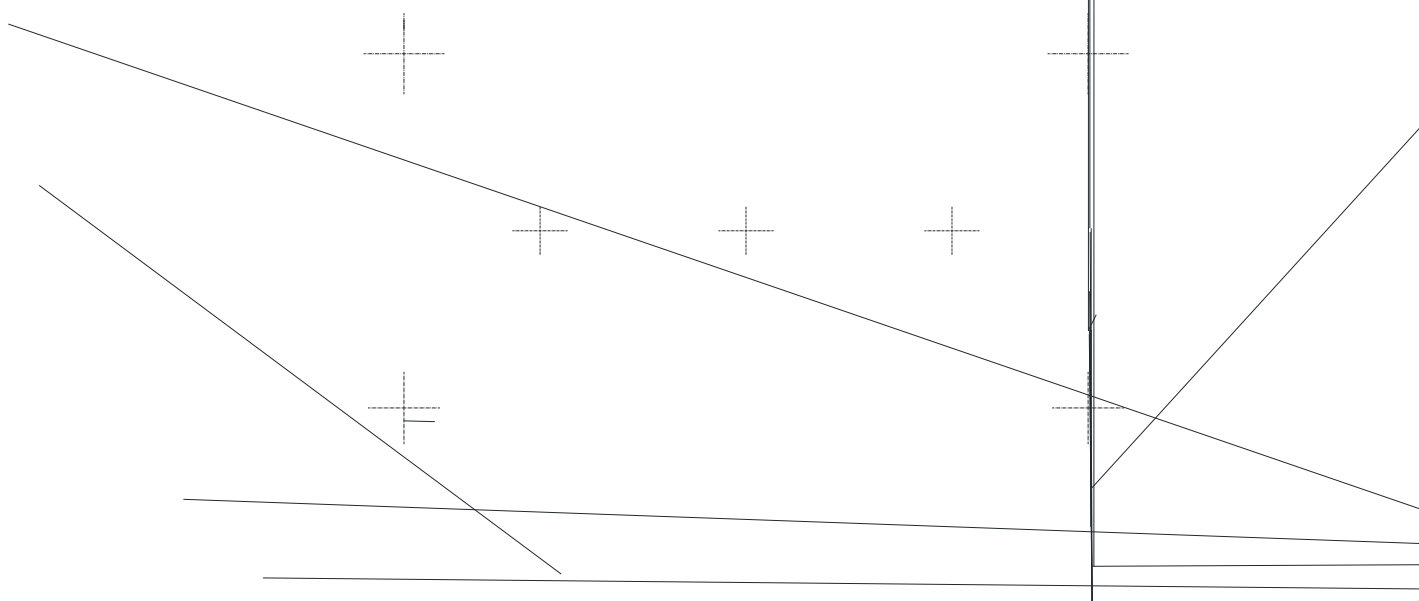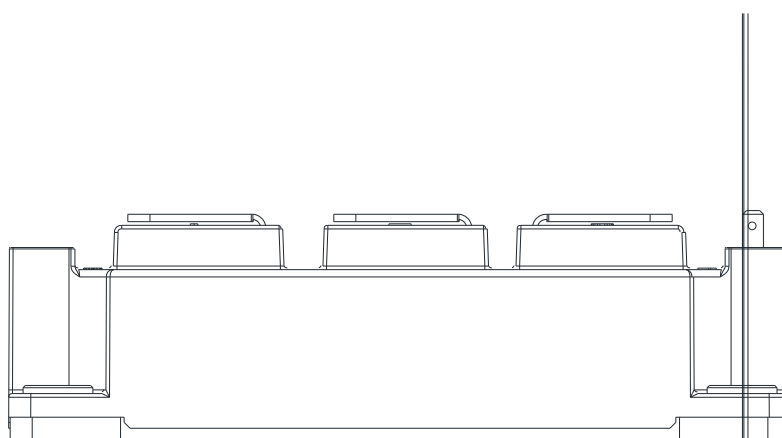



RoHS
COMPLIANT
