



MD160S-M5

Glass Passivated Three Phase Rectifier Bridge


V_{RRM} 800 to 1800V
I_D 160 A

Applications

- γ Three phase rectifiers for power supplies
- γ Rectifiers for DC motor field supplies
- γ Battery charger rectifiers
- γ Input rectifiers for variable frequency drives

Features

- γ Three phase bridge rectifier
- γ Blocking voltage:800 to 1800V
- γ Heat transfer through aluminum oxide DBC ceramic isolated metal baseplate
- γ Glass passivated chip
- γ UL recognized applied for file no. E360040

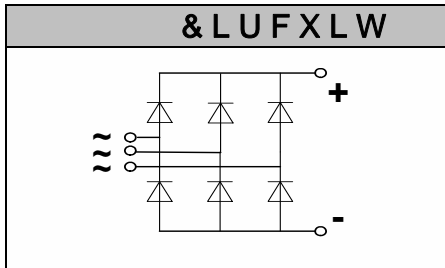

		RSM
MD160S08M5	800V	900V
MD160S12M5	1200V	1300V
MD160S16M5	1600V	1700V
MD160S18M5	1800V	1900V

Maximum Ratings

Symbol	Conditions	Values	Units
I _D	Three phase, full wave $\tau_c=100$	160	A
I _{FSM}	$t=10\text{ms}$ $T_{vj}=45$	1800	A
i^2t	$t=10\text{ms}$ $T_{vj}=45$	16200	A ² s
Visol	a.c.50HZ;r.m.s.;1min	3000	V
T _{vj}		-40 to +150	
T _{stg}		-40 to +125	
M _t	To terminals(M6)	5–15%	Nm
M _s	To heatsink(M6)	5–15%	Nm
Weight	Module(Approximately)	194	g

Thermal Characteristics




Symbol	Conditions	Values	Units
R _{th(j-c)}	Per diode	0.65	/W
R _{th(c-s)}	Module	0.03	/W

Electrical Characteristics

Symbol	Conditions	Values			Units
		Min.	Typ.	Max.	
V _{FM}	T=25 I _F =300A	É	1.50	1.75	V
I _{RD}	T _{vj} =25 V _{RD} =V _{RRM} T _{vj} =150 V _{RD} =V _{RRM}	É	É	0.5 6	mA mA




Performance Curves



Package Outline Information

CASE 0M5

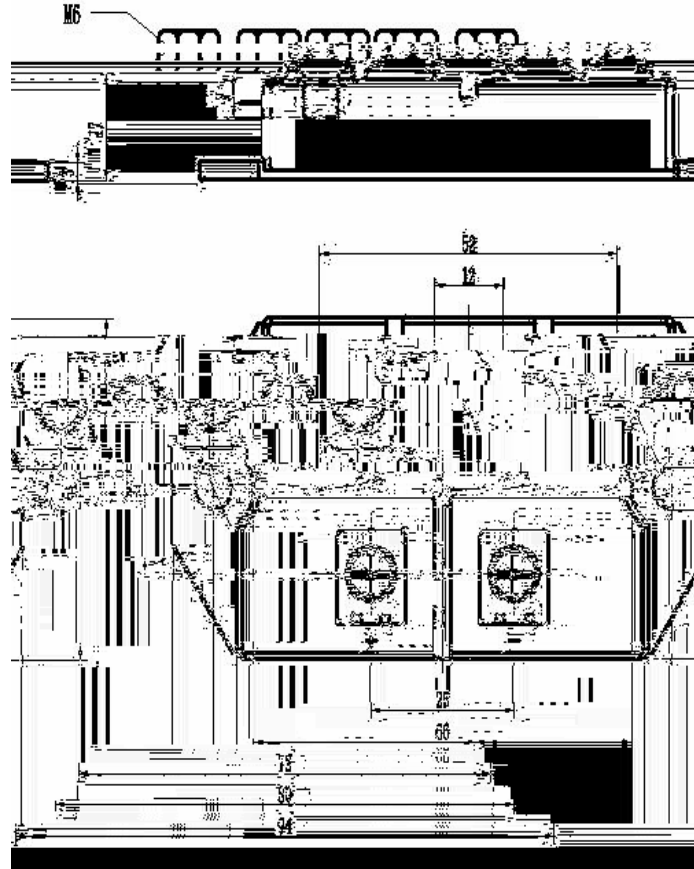

Dimensions in mm