



N-Channel Enhancement Mode Field Effect Transistor

Product Summary

V_{DS}	40V
I_D	310A
$R_{DS(ON)}$ (at $V_{GS}=10V$)	0.95m
100% EAS Tested	
100% V_{DS} Tested	

General Description

Excellent package for heat dissipation

YJG310G04HJRQ

RECOMMEND
[YJG300G04HRQ](#)
FOR NEW DESIGN

RECOMMEND
YJG300G04HRQ
FOR NEW DESIGN

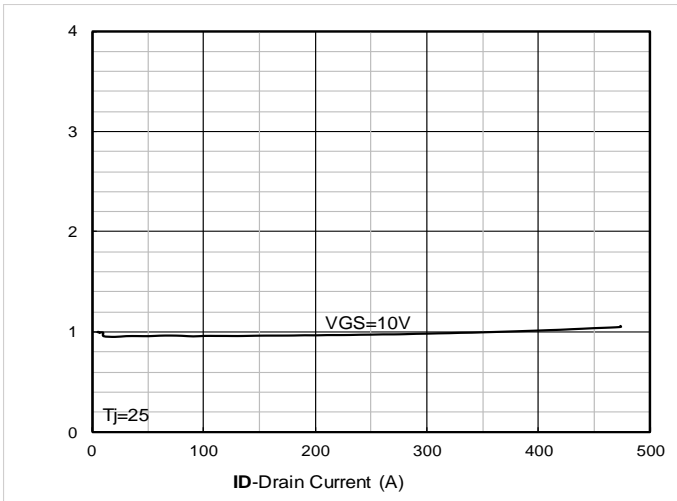


Figure 7. RDS(on) VS Drain Current

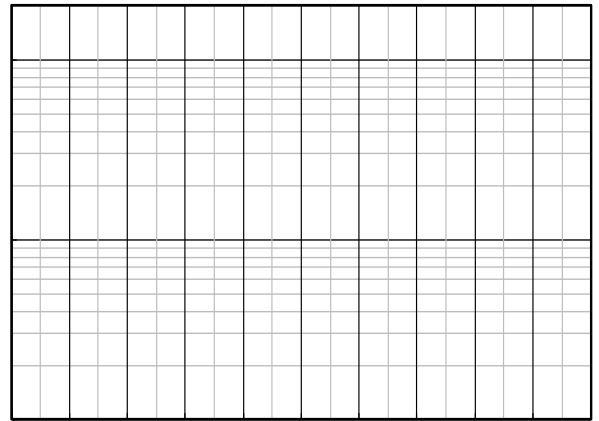


Figure 8. Forward characteristics of reverse diode

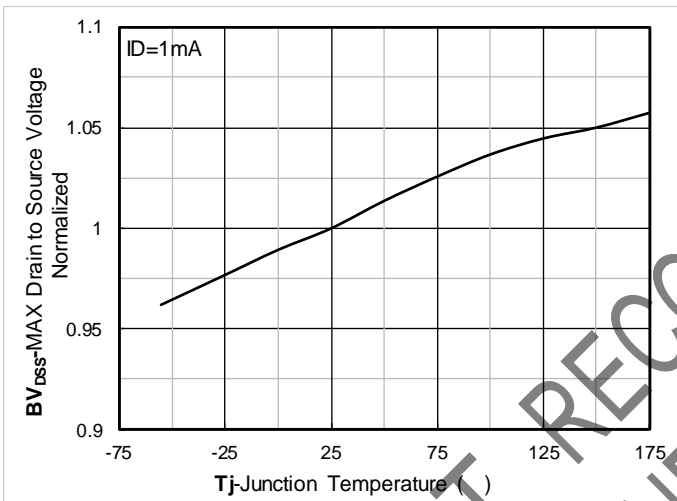


Figure 9. Normalized breakdown voltage

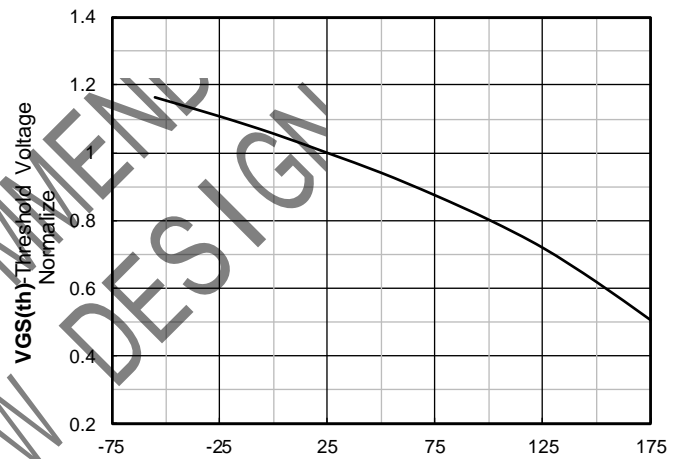


Figure 10. Normalized Threshold voltage

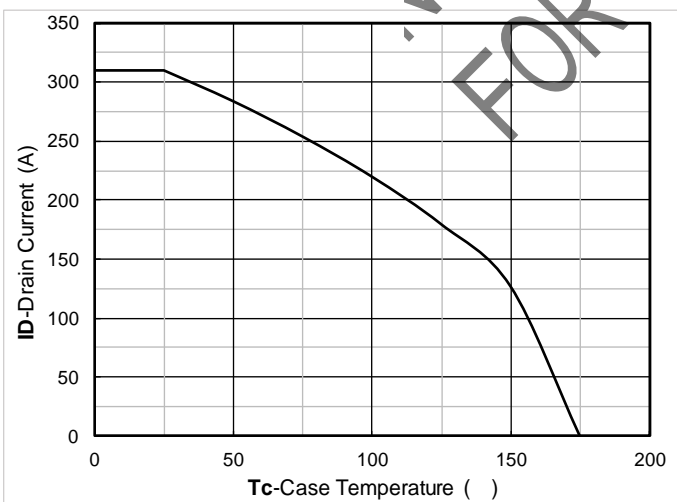


Figure 11. Current dissipation

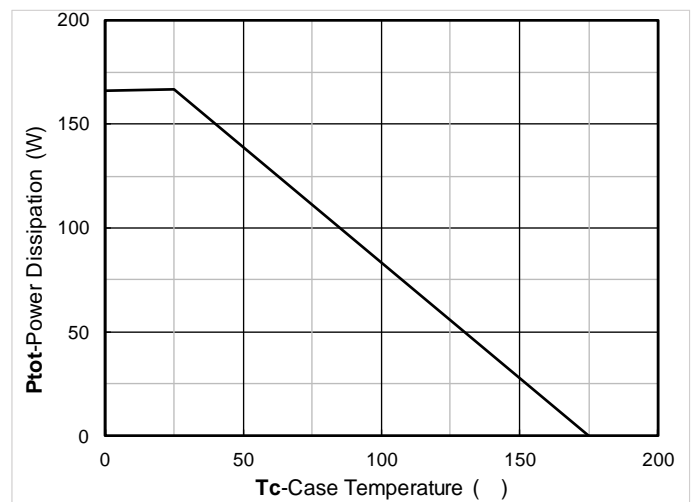


Figure 12. Power dissipation

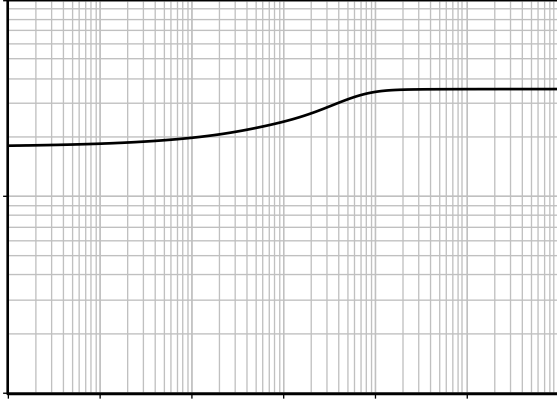



Figure 13. Maximum Transient Thermal Impedance

Figure 14. Safe Operation Area

NOT RECOMMENDED
FOR NEW DESIGN



PDFN5060-8L-0.95MM Package information

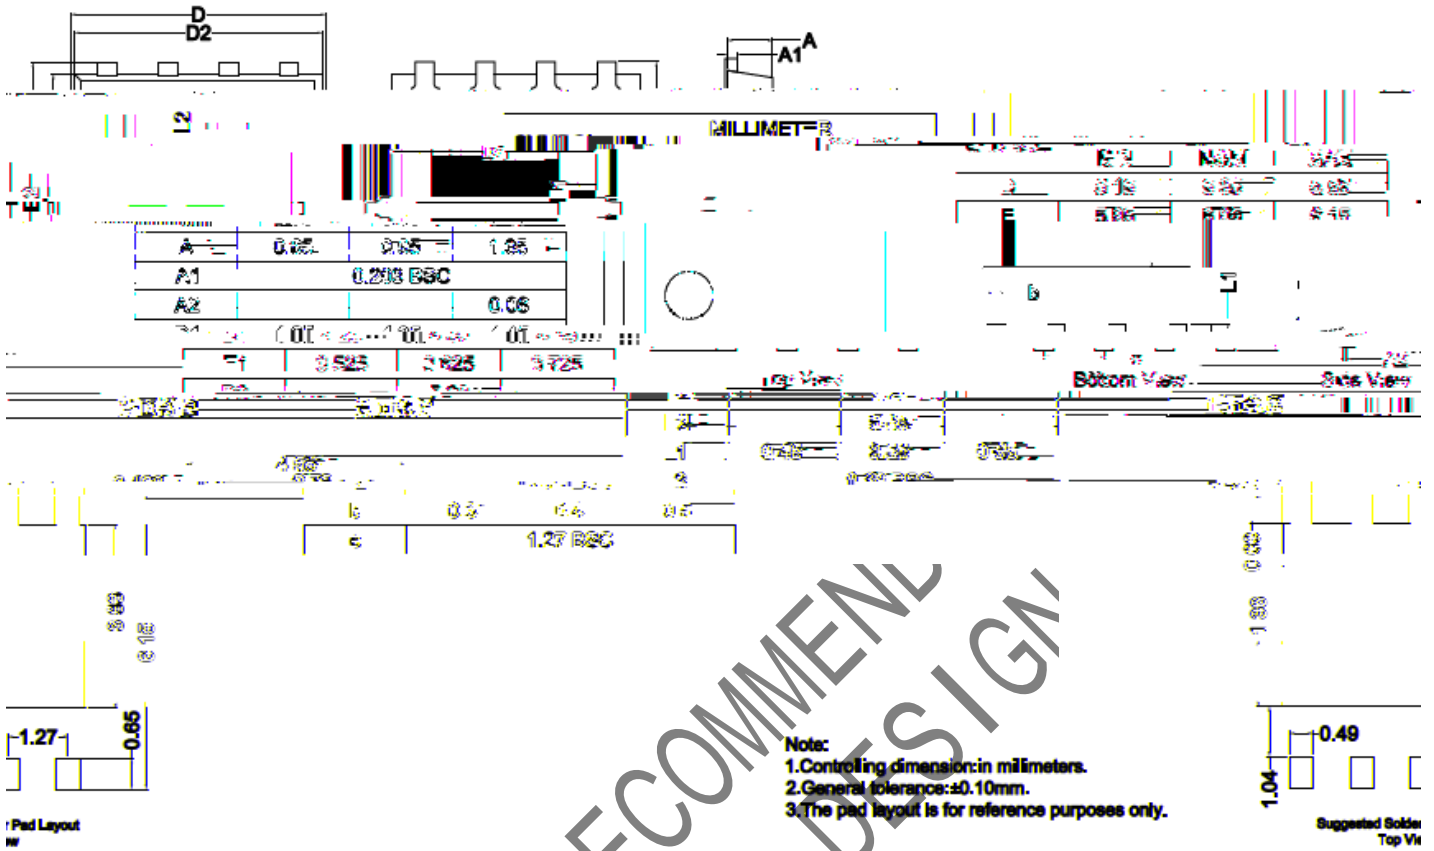



YJG310G04HJRQ

RECOMMEND
[YJG300G04HRQ](#)
FOR NEW DESIGN

Disclaimer

The information presented in this document is for reference only and does not constitute a contract. The information is subject to change without notice. The user should refer to the latest version of the product specification for detailed information.