

✓ Absolute Maximum Ratings 78 -

[illegible]

\$YDODQFKH% HQHUJ\

(\$ 6

P -

-XQFWLRQ DQG 6WRUDJH 7HPSHUDWXUH 5DQJH	7	-
--	---	---

	6WHDG\ 6WDWH	-\$	5			
--	--------------	-----	---	--	--	--

7KHUPDO 5HVLVWDQFH -XQFWLRQ WR &DVH

-& 6WHDG\ 6WDWH

5

			3\$&\$. \$*(SFV	,11(5 %2; 48\$17,7< SF	287(5 &\$572; 48\$17,7< SF	'(/,9(5< 02'
< - * ' * + 4	)	< - * ' * +				³ U

$$3 \quad \text{U} \text{H} \text{H} \text{O}$$

6 ' <DQJ]KRX <DQJMEH7H0K0W0RDL&R /WG

5 H Y ~~0~~ D Q P

9

\$ 6 7 H V W H G







YJG4D5G04HQ

vElectrical Characteristics 7 XQOHVV RWKHUZZLVH QRWHG

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Static Parameter						
'UDLQ 6RXUFH %UHDNGRZQ 9ROWDJH		*6 9, P\$	9			9
=HUR *DWH 9ROWDJH 'UDLQ &XUHHQW		'6 9 9 9	9			\$
*DWH %RG\ /HDNDJH &XUHHQW		*6, " 9 9 9	9		"	Q\$



Typical Electrical and Thermal Characteristics Diagrams

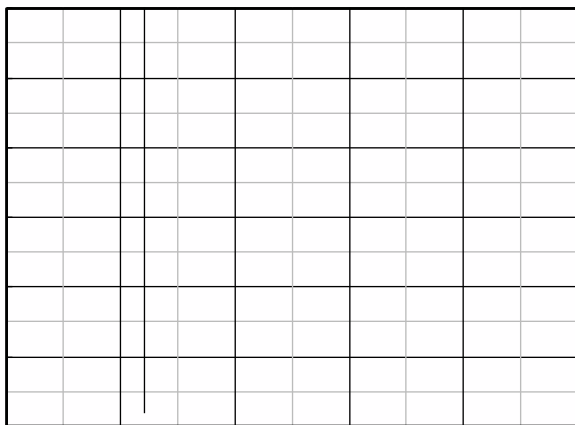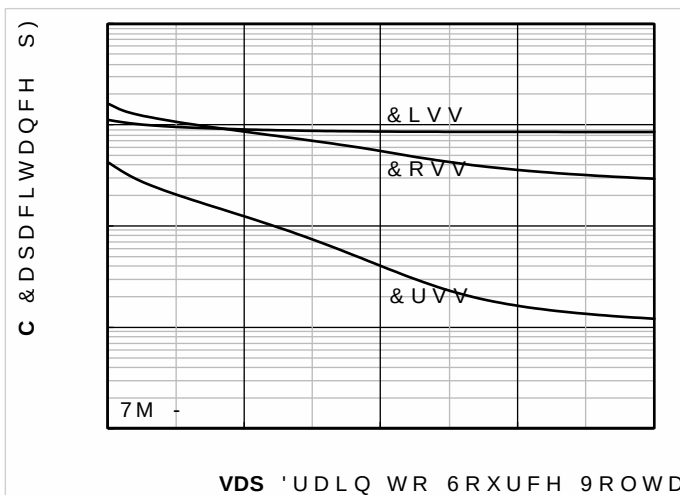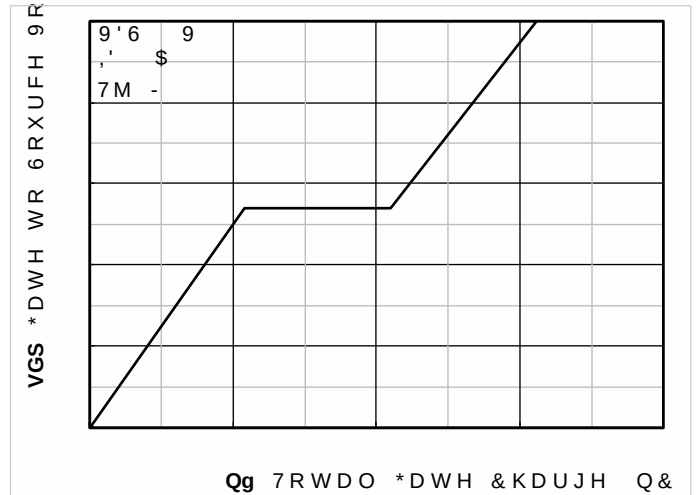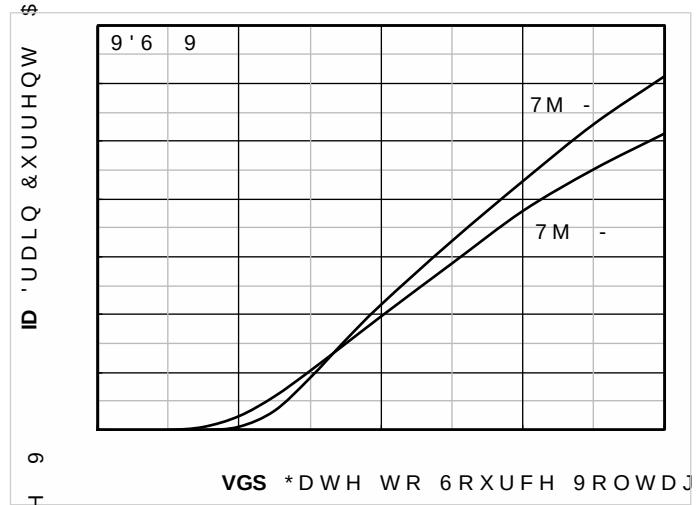




YJG4D5G04HQ

ÉDU 0)`¥ P 0 € @ € Ç 0 € Qñ7i 2Xv@T5 À 0




YJG4D5G04HQ

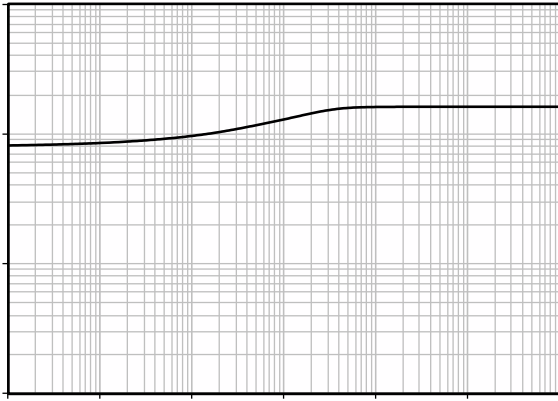




YJG4D5G04HQ

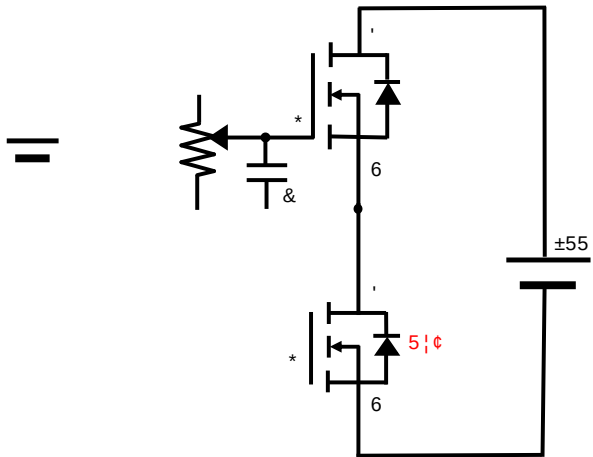




YJG4D5G04HQ


vPDFN5060-8L-1.1MM Package information

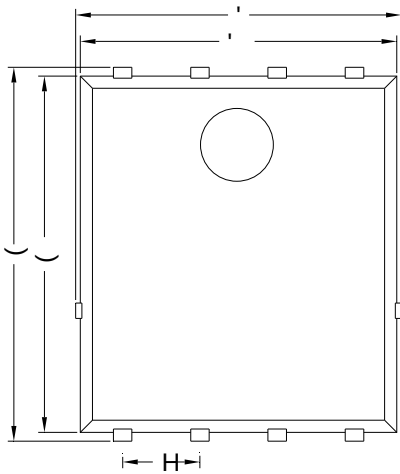


7RS 9LHZ
!"M'?"ö .

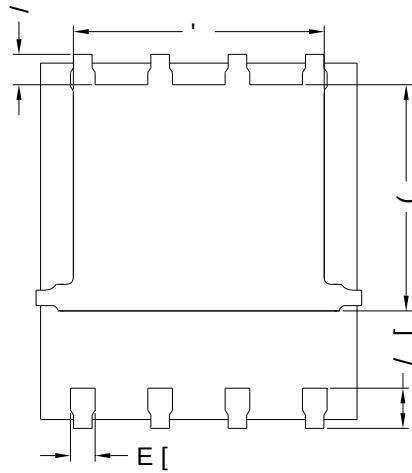

%RWWRP 9LHZ
6üM'?"ö .

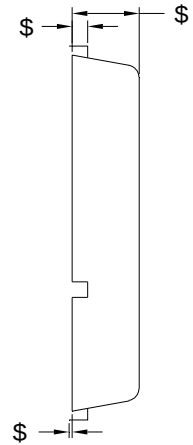

6LGH 9LHZ
xM'?"ö .

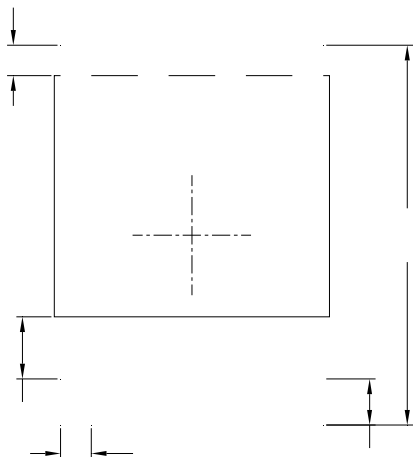

6 < 0 % 2 /	0, /, /, 0 (7 (5		
	0, 1	12 0	0 \$;
,			
(			
\$			
\$	% 6 &		
\$			
,			
(			
,			
(			
(	5 ()		
(	5 ()		
/			
/	% 6 &		
E			
H	% 6 &		

1RWH
6XJJHVWHG 6ROGHU 3DG /D\RXW
7RS 9LHZ
&RQWUROOLQJ GLPHQVLRQ LQ PLOOLPHWHU
*HQHUDO WROHUDQFH " PP
7KH SDG OD\RXW LV IRU UHIHUHQFH SXUS

< - * ' * + 4

<DQJJKRX <DQJMLH (OHFWURQL