

Z2200- FAST RECOVERY DIODE


400V 4500V

FAST RECOVERY RECTIFIER DIODE

Features:

- . All diffused structure
- . High surge rating
- . Blocking capability up to 4500 volts
- . Soft recovery
- . Ceramic housing hermetic package
- . Pressure assembled device

D13C

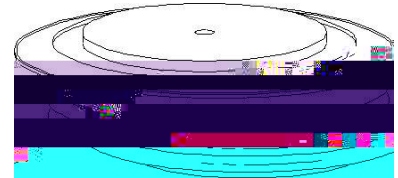

ELECTRICAL CHARACTERISTICS AND RATINGS

Reverse Blocking

V_{RRM} = Repetitive peak reverse voltage

V_{RSM} = Non repetitive peak reverse voltage (2)

Repetitive peak reverse leakage current	I_{RRM}	10 mA 150 mA (3)
---	-----------	---------------------

Conducting - on state

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Average forward current	$I_{F(AV)}$		2200		A	Sinewave 180°, $T_c = 70$
RMS forward current	I_{FRMS}		3454		A	
Peak one cycle surge (non repetitive) current	I_{FSM}		33000		A	10 msec (50Hz), sinusoidal wave-shape, 180° conduction, $T_j = 125$
I square t	I^2t		54.4 10 ⁵		A ² s	8.3 msec and 10.0 msec
Peak forward voltage	V_{FM}		3.0		V	$I_{FM} = 3000A$; Duty cycle 0.01%
Threshold voltage	V_{FO}		1.10		V	$T_j = 125^\circ C, I = 0.5 I_{F(AV)}$ to 1.5 $I_{F(AV)}$
Slope resistance	r_F		0.25		mΩ	$T_j = 125^\circ C, I = 0.5 I_{F(AV)}$ to 1.5 $I_{F(AV)}$
Reverse Recovery Current	$I_{RR}(4)$	~ 6		*	A	$I_{FM} = 1000 ?$

On-state

