

KK3000-FAST SWITCHING THYRISTOR


2500-2800 V_{DRM}

HIGH POWER THYRISTOR FOR INVERTER APPLICATION

Features:

- . All Diffused Structure
- . Amplifying Gate Configuration
- . Blocking capability up to 2800 volts
- . High dv/dt Capability
- . Pressure Assembled Device

T15C

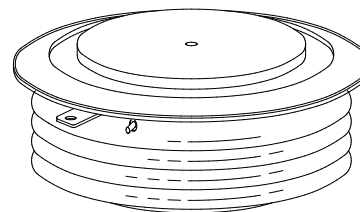

ELECTRICAL CHARACTERISTICS AND RATINGS

Blocking - Off State

Device Type	V_{RRM} (1)	V_{DRM} (1)	V_{RSM} (1)
KK3000/25	2500	2500	2500
KK3000/28	2800	2800	2800

V_{RRM} = Repetitive peak reverse voltage
 V_{DRM} = Repetitive peak off state voltage
 V_{RSM} = Non repetitive peak reverse voltage (2)

Repetitive peak reverse leakage and off state leakage	I_{RRM}/I_{DRM}	5 mA 150 mA (3)
Critical rate of voltage rise	dv/dt (4)	1000 V/ μ s

Notes

All ratings are specified for $T_j=25^\circ\text{C}$ unless otherwise stated.

(1) All voltage ratings are specified for an applied 50Hz/60Hz sinusoidal waveform over the temperature range 0 to $+125^\circ\text{C}$

(2) 10 msec. Max. Pulse width

(3) Maximum value for $T_j=125^\circ\text{C}$.

(4) Minimum value for linear and exponential waveshape to 67% rated V_{DRM} . Gate open, $T_j=125^\circ\text{C}$

(5) The value of di/dt is established in accordance with JB/T4193-2013.

Conducting - On State

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Average value of on-state current	$I_{T(AV)}$		3000		A	Sinewave, 180° conduction, $T_c=55^\circ\text{C}$
RMS value of on-state current	I_{TRMS}		4710		A	Nominal value
Peak one cycle surge (non repetitive) current	I_{TSM}		36000		A	10 msec (50Hz), sinusoidal waveshape, 180° conduction, $T_j = 125^\circ\text{C}$
I square t	I^2t		6.5×10^6		A^2s	10 msec
Latching current	I_L		1000		mA	$V_D=12\text{V}$; $R_L=12\text{ohms}$
Holding current						

ELECTRICAL CHARACTERISTICS AND RATINGS KK3000-FAST SWITCHING THYRISTOR

Gating

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Peak gate power dissipation	P_{GM}		20		W	
Average gate power dissipation	$P_{G(AV)}$		4		W	
Gate-trigger current	I_{GT}		150		mA	$V_D=12V; R_L=3ohms; T_J=+25^{\circ}C$
Gate- trigger voltage	V_{GT}	0.70	2.5		V	$V_D=12V; R_L=3ohms; T_J=+25^{\circ}C$
Peak negative voltage	V_{GRM}		5		V	

Dynamic

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Delay time	t_d		3.0	2.5	s	$I_{TM}=1000A; V_D=67\%V_{DRM}$ Gate pulse: $V_G=30V; R_G=10ohms;$ $t_r=0.1 s; t_p=20 s$
Turn-off time (with $V_R = -5 V$)	t_q		70		s	$I_{TM} = 3000 A; di/dt = - 25 A/ s;$ $V_R = 50 V; dv/dt=30V/ s ;$ $V_D= 67\%V_{DRM}; T_J=125^{\circ}C$
Reverse recovery charge	Q_{rr}				C	$I_{TM}=3000 A; di/dt=-10A/ s;$ $V_R=50 V; T_J=125^{\circ}C$

THERMAL AND MECHANICAL CHARACTERISTICS AND RATINGS

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Operating temperature	T_j	-40	+125		$^{\circ}C$	
Storage temperature	T_{stg}	-40	+140		$^{\circ}C$	
Thermal resistance - junction to case	$R_{(j-c)}$		0.008		$^{\circ}C/W$	Double sided cooled
Thermal resistance - case to heatsink	$R_{(c-s)}$		0.002		$^{\circ}C/W$	Double sided cooled
Mounting force	F	55	65	60	kN	
Weight	m			1.40	kg	

* Mounting surfaces smooth, flat and greased

