

KS500-Bidirectional thyristor

4000-4500 V_{DRM}

HIGH POWER BIDIRECTIONAL THYRISTOR

Features

- . Amplifying Gate Configuration
 - . Two thy
-

ELECTRICAL CHARACTERISTICS AND RATINGS

KS500-Bidirectional thyristor

Gating

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions


Dynamic

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions

THERMAL AND MECHANICAL CHARACTERISTICS AND RATINGS

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions

Mounting surfaces smooth, flat and greased

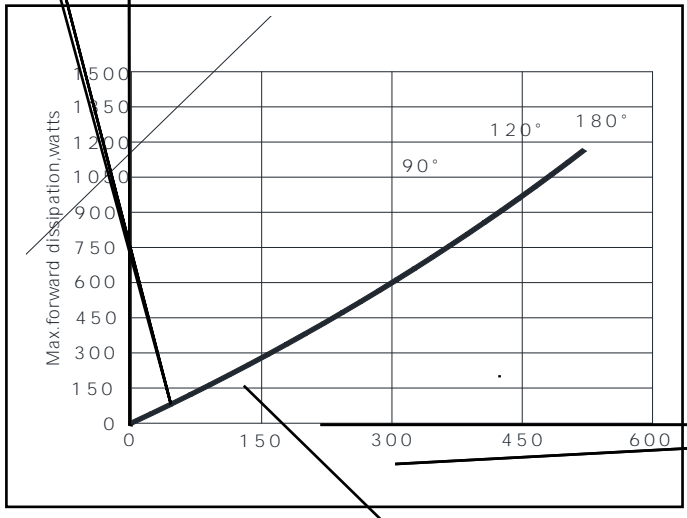

KS500-Bidirectional thyristor

