



1- Line, Bi-directional, ESD protection diode

Features

$\pm 30\text{kV}$ contact, $\pm 30\text{kV}$ air
24A ($t_p=8/20\mu\text{s}$)

Applications

Switches / Buttons
Test Equipment/Instrumentation

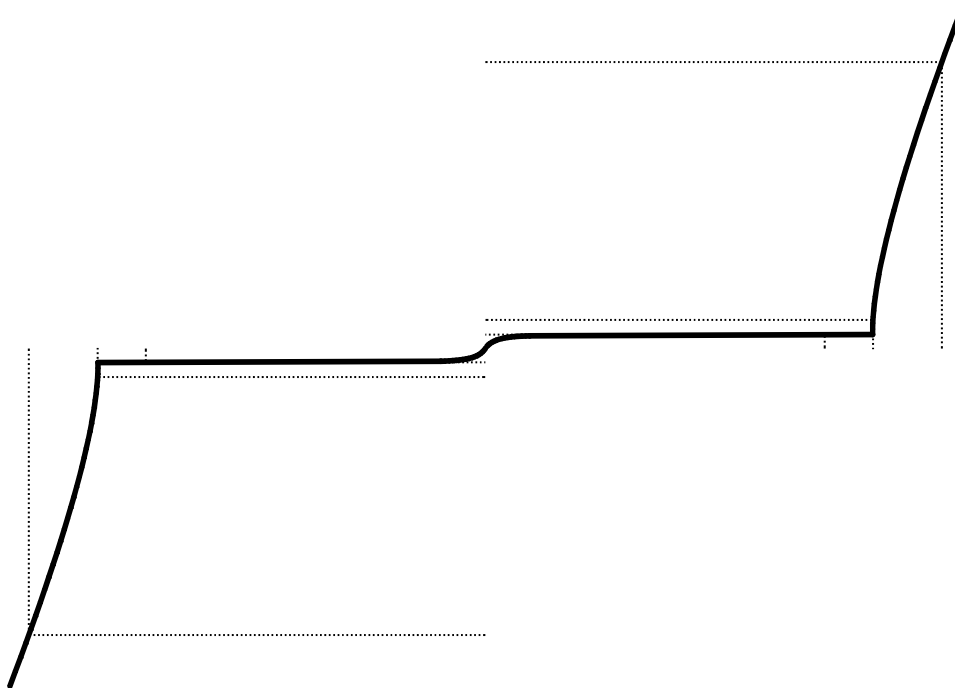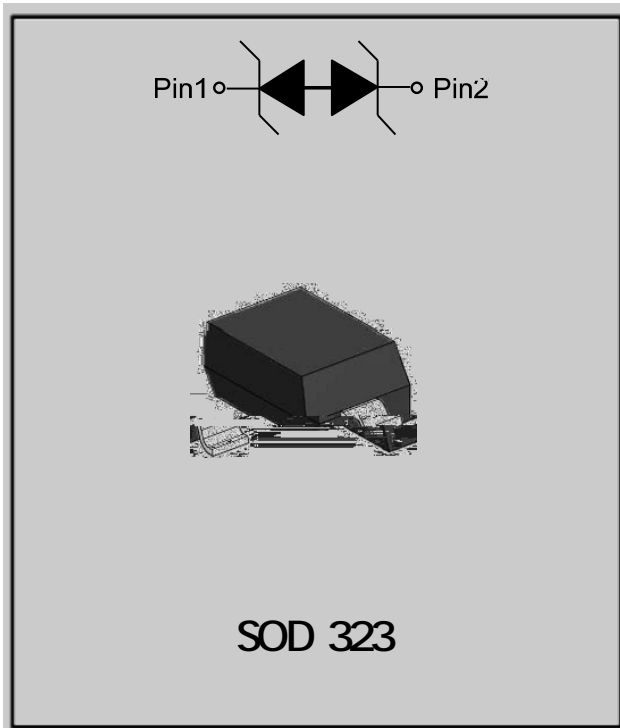




ESD5V0D3BQ

Maximum Ratings

PARAMETER	SYMBOL	LIMITS	UNIT
-----------	--------	--------	------



ESD5V0D3BQ

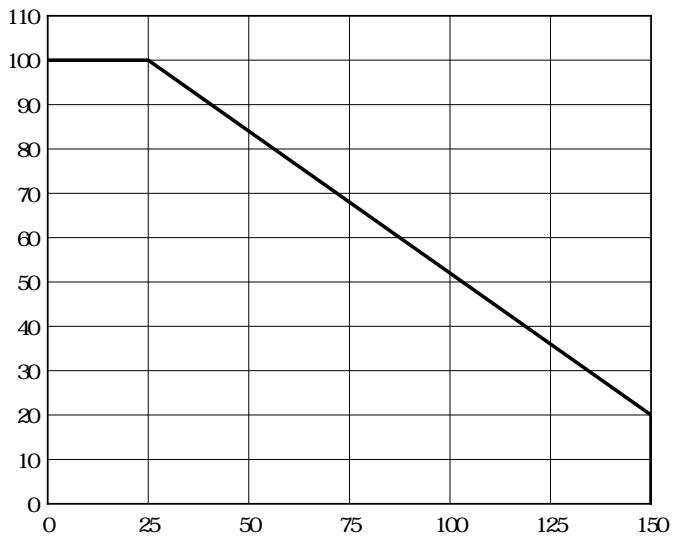



ESD5V0D3BQ
