



MMBZ27VAQ

Zener Diodes, 40 Watt Peak Power Dual Common Anode Zeners

Features

"627í 3DFNDJH \$OORZV (LWKHU 7ZR 6H
8QLGLUHFWLRQDOLRQRQRUJXU6LQJOH
%LGLUHFWLRQDO &RQILJXUDWLRQ
" 3HDN 3RZHU :# PV 8QLGLUHFWLRQD
" 7UDQVLHQW SURWHFWLRQ IRU HDFK O
,(& (6' "9 RQWDFW " N9 DL
" (6' 5DWLQJ &ODVSHU WKH +%0
"0D[LPXP &ODPSLQJ 9ROWDJH#3HDN 3XO
" 5R+6 &RPSOLDQW
" 3DUW QR Z4WKHDXQVL\$(& 4 TXDOLILH

Applications

"7HVW (TXLSPHQW ,QVWUXPHQWDWLRQ
"1RWHERRNV 'HVNWRSV 6HUYHUV
"&RPSXWHU 3HULSKHUDOV
"\$XWRPRWLYH DSSOLFDWLRQV

Mechanical Data

" 3DFNDJH 627
" /HDG)LQLVK 0DWWH 7LQ
" &DVH 0DWHULDO 3*UHHQ' 0ROGLQJ &R
" 0RLVWXUH 6HQVLWLYLW\ /HYHO SHU

Definitions of electrical characteristics






MMBZ27VAQ

Maximum Ratings


PARAMETER	SYMBOL	LIMITS	UNIT
3 HDN SXOVH ₃ SRZHU W	3 _{SN}		:
(6' DFFRUGLQJ WR ,(& DLU GLVFKDUJH	9 _{(6'}	"	.9
(6' DFFRUGLQJ WR ,(& FRQWDFW GLVFKDUJH		"	

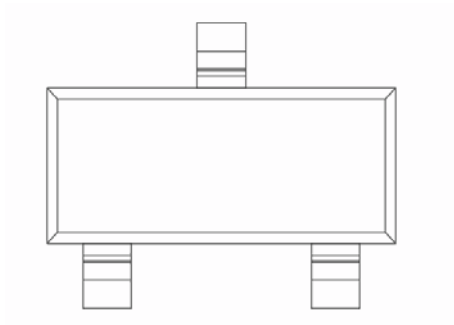



MMBZ27VAQ

3RZHU 'LVVLSDWLRQ P: vCharacteristics 7\SLFDO
)LJ . 3

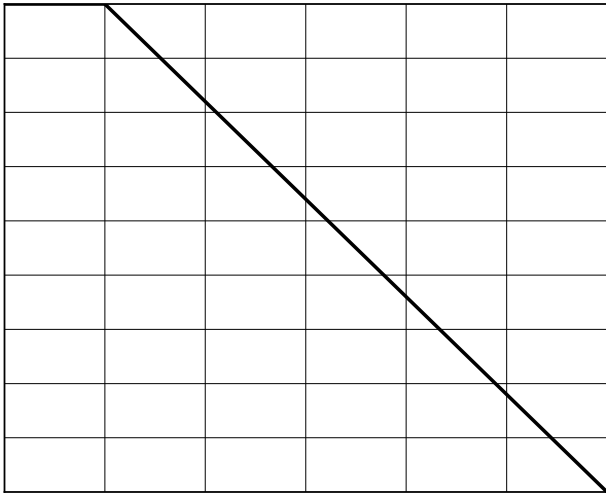


7_{\$}



3H DN 3XOVH 'HUDWLQJ , Q 2I 3HDN 3RZHU
2U &XUUHQW#7


)LJ 3RZHU 'HUDWLQJ &XUYH

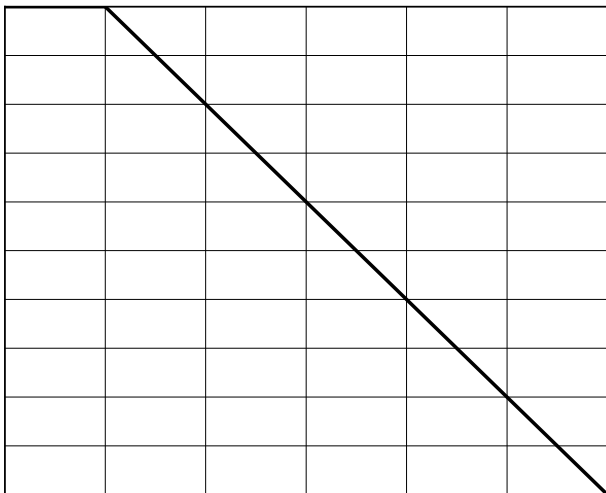

\$PELHQWUDWSH 7

MMBZ27VAQ

vOutline Dimensions

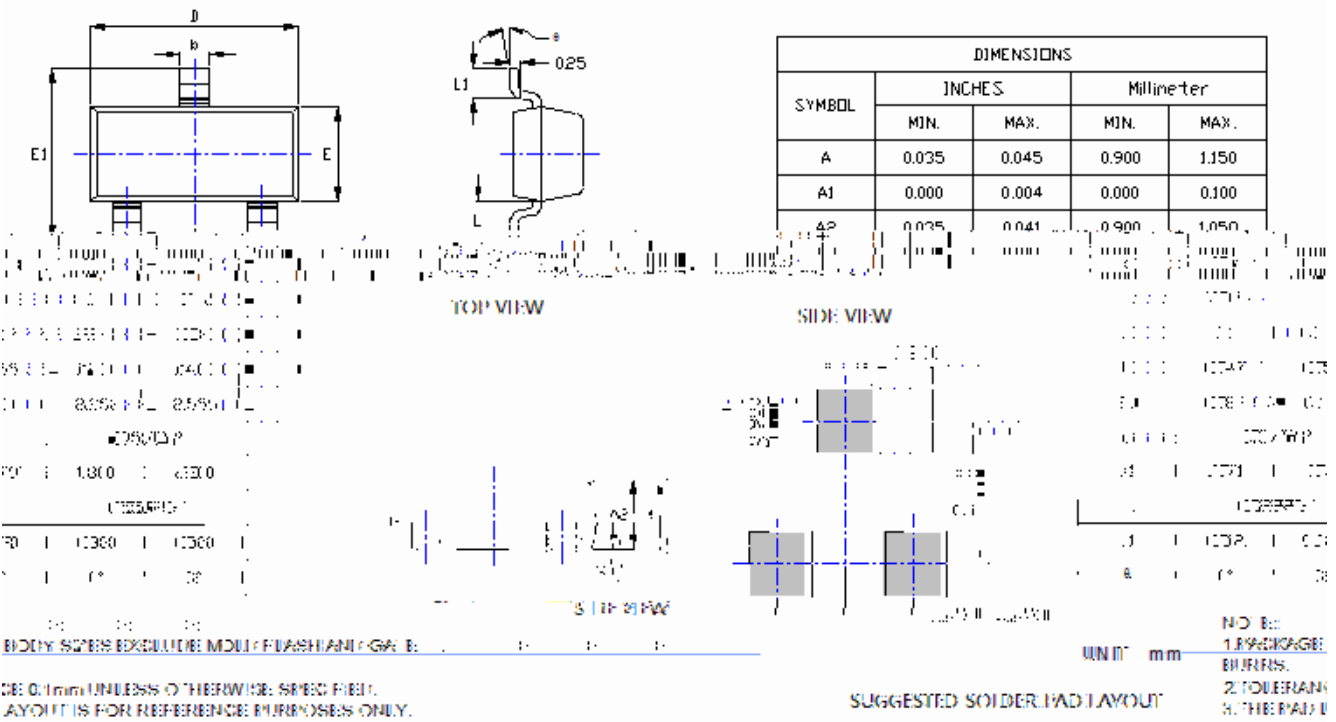

MMBZ27VAQ
