



**BC846BPNQ**

ÁHÁDÁ Í Á

ÚÈÛÍÏÏJÁ  
Ú^ÇÉFÉFÉGGÉTæ!ÈGIÁ

ÿæ}\*:@[~Áÿæ}\*bá^ÁÒ|^&c![]}á&ÁV^&@}[[[\*^ÁÔ[ÉÉÁŠcáÉÁ  
Á



# BC846BPNQ

TR1 NPN Pin1 2 6 Characteristics

Fig 2 - DC Current Gain


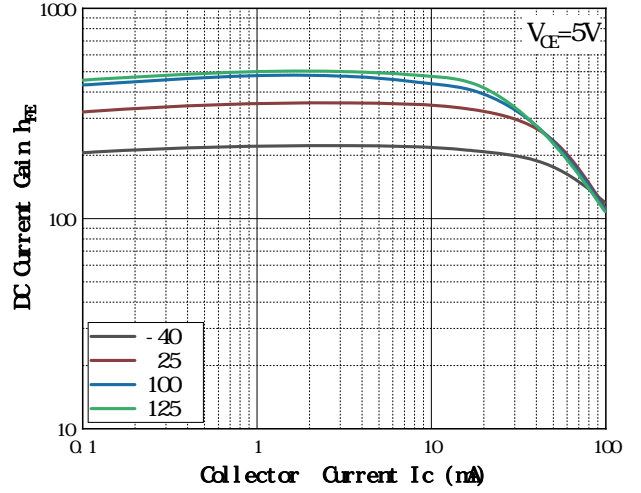



Fig 3 - Collect-Emittter Saturation Voltage



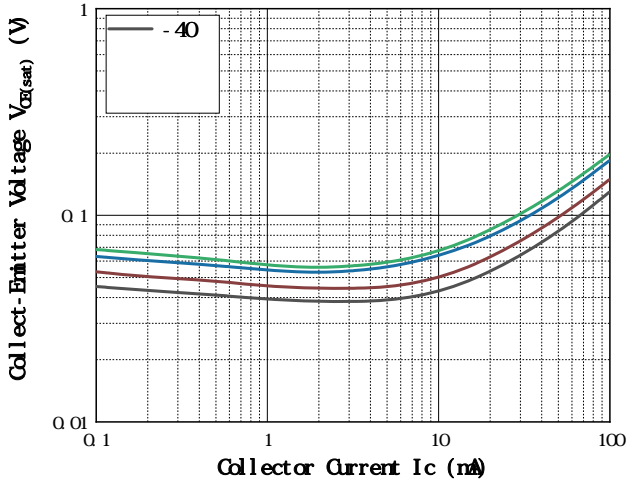

TR2 PNP Pin3 4 5 Characteristics

Vertical line of dots on the left margin.

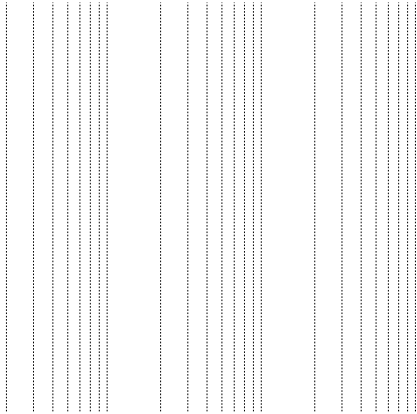


Á Í Á D Á Í Á




# BC846BPNQ

## SOT-363 Package Outline Dimensions

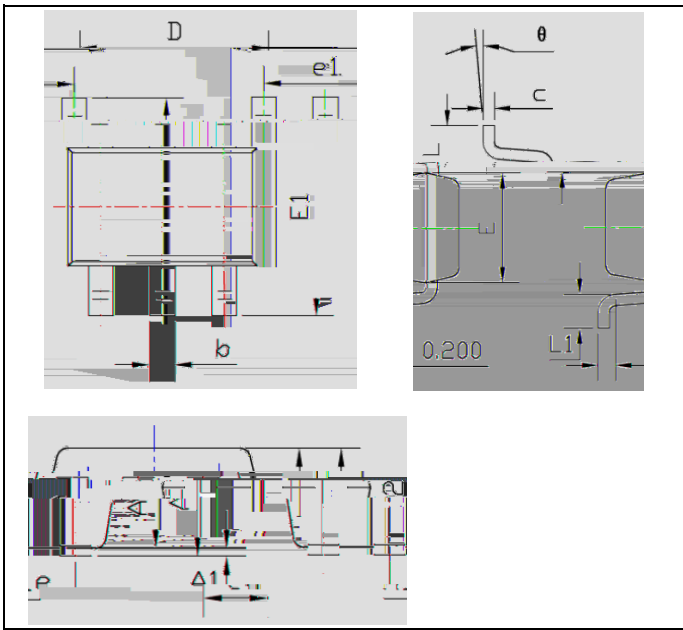

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.035	0.043	0.900	1.100
A1	0.000	0.004	0.000	0.100
c	0.004	0.010	0.100	0.250
D	0.071	0.087	1.800	2.200
e	0.005	0.053	0.125	1.350
e1	0.085	0.096	2.150	
F	0.650TYP			
L1	e	0.026TYP		


## SOT-363 Soldering Footprint

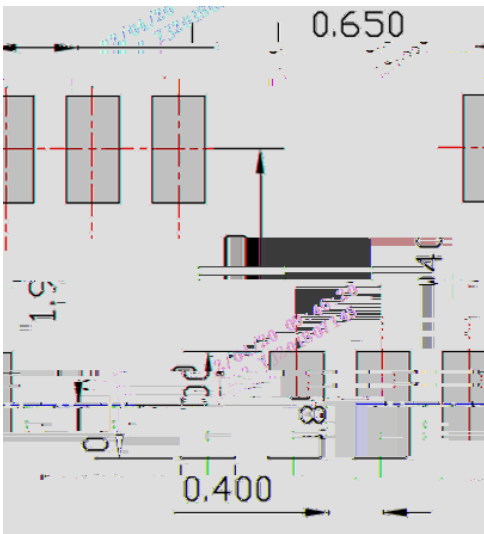

Unit mm



Marking Information

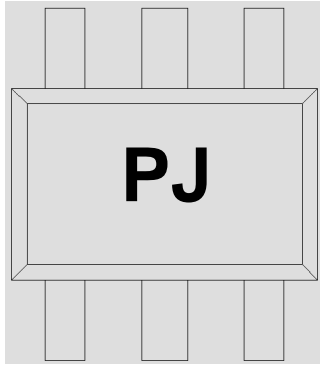

PJ  
FÉACE||Á { æ:\ä } \*Áä•ÁæcÁ { äää|^Á [-Ác@^Á ]!| [ ä ~ &clä [ ä ^  
GÉACE||Á { æ:\ä } \*Áä•Áä } Á|æ•^!Á { æ:\ä } \*  
HÉÁÚRÁä•ÁTæ!\ä } \*ÁÓ [ ä ^  
IÉÁÓ [ ä ^ Á & [ | [ !KÁÓ|æ&\

