




X Ideal for Medium Power Amplification and Switching

- X SOT-363
- X Tin plated leads, solderable, per J-STD-002 and JESD22-B102
- X KNM

Ω

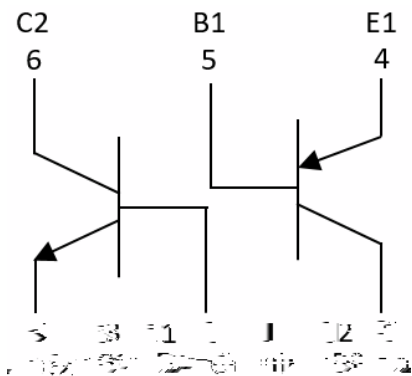

Ω

(Example)

MMDT5451Q	F2	Approximate 0.009g	3000	30000	120000	70
-----------	----	--------------------	------	-------	--------	----



Ω (Ta=25 Unless otherwise specified)

Collector-Base Voltage	V_{CBO}	V	-160
Collector-Emitter Voltage	V_{CEO}	V	-150
Emitter-Base Voltage	V_{EBO}	V	-5





Ω (Ta=25 Unless otherwise specified)

Collector-Base Voltage	V_{CBO}	V	180
Collector-Emitter Voltage	V_{CEO}	V	160
Emitter-Base Voltage	V_{EBO}	V	6
Collector Current	I_C	mA	200



(Typical)

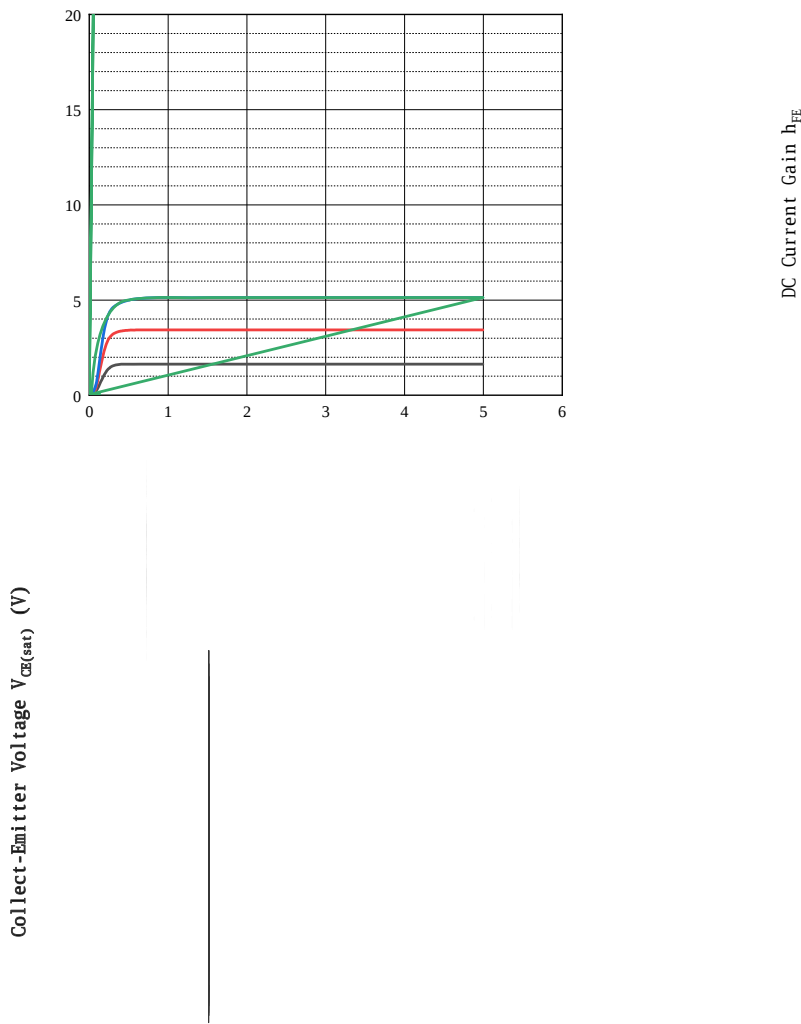

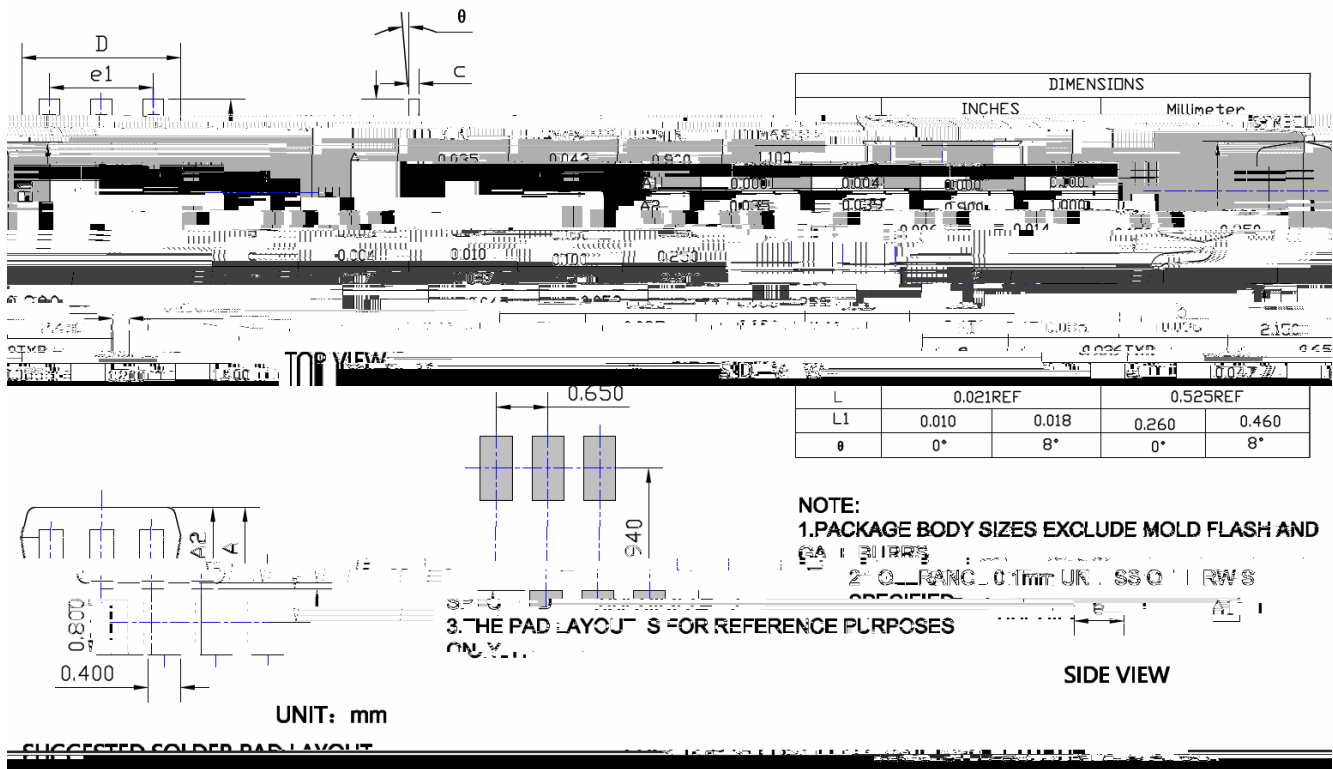



The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.