


Silicon Carbide Schottky Diode

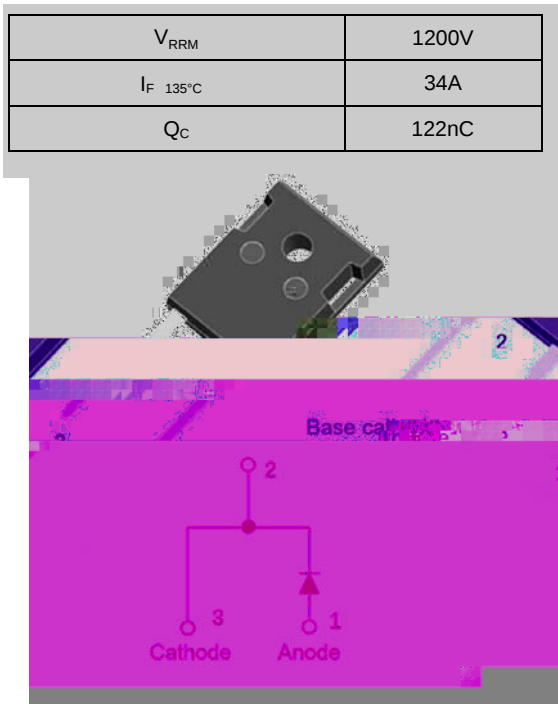

Features

- Positive temperature coefficient
- Temperature-independent switching
- Maximum working temperature at 175 °C
- Unipolar devices and zero reverse recovery current
- Zero forward recovery current
- Essentially no switching losses
- Reduction of heat sink requirements
- High-frequency operation
- Reduction of EMI

Typical Applications

Typical applications are in power factor correction(PFC), solar inverter, uninterruptible power supply, motor drives, photovoltaic inverter, electric car and charger.

Mechanical Data

- **Package:** TO-247AC
- **Terminals:** Tin plated leads
- **Polarity:** As marked

■Maximum Ratings ($T_c=25^{\circ}\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	VALUE
Device marking code			D112030NGG3
Reverse voltage (repetitive peak) @ $T_j=25^{\circ}\text{C}$	V_{RRM}	V	1200
Reverse voltage (Surge Peak) @ $T_j=25^{\circ}\text{C}$	V_{RSM}	V	1200
Reverse voltage (DC) @ $T_j=25^{\circ}\text{C}$	V_{DC}	V	1200
Continuous forward current @ $T_c=25^{\circ}\text{C}$ $T_c=135^{\circ}\text{C}$ $T_c=142^{\circ}\text{C}$	I_F	A	73 34 30
Non-repetitive peak forward surge current @ $T_c=25^{\circ}\text{C}$, $t_p=10\text{ms}$, Half Sine Wave	I_{FSM}	A	250
Power Dissipation@ $T_c=25^{\circ}\text{C}$ $T_c=110^{\circ}\text{C}$	P_{TOT}	W	326 141
i^2t Value@ $T_c=25^{\circ}\text{C}$, $t_p=10\text{ms}$	$\int i^2 dt$	A^2S	312

Operating junction and Storage temperature range

T_j, T_{stg} $^{\circ}\text{C}$ -55°C 175°C



■Electrical Characteristics

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	Typ.	Max.
Forward voltage drop	V_F	V	$I_F=30A, T_J=25^{\circ}C$	1.54	1.75
			$I_F=30A, T_J=175^{\circ}C$	2.3	
Reverse leakage current	I_R	μA	$V_R=1200V, T_J=25^{\circ}C$	0.5	33
			$V_R=1200V, T_J=175^{\circ}C$	7	
Total capacitive charge	Q_C	nC	$V_R=800V, T_J=25^{\circ}C, Q_C=\int_0^{V_R} C(V)dV$	122	
Total capacitance	C	μF	$V_R=0V, f=1MHz$	1722	
			$V_R=400V, f=1MHz$	116	
			$V_R=800V, f=1MHz$	85	
Capacitance Stored Energy	E_C	μJ	$V_R=800V$	32	

■Thermal Characteristics $T_a=25^{\circ}C$ Unless otherwise specified

PARAMETER	SYMBOL	UNIT	VALUE
Thermal resistance	$R_{\theta J-C}$	$^{\circ}C/W$	0.46

■Characteristics (Typical)

Figure 1. Forward Characteristics

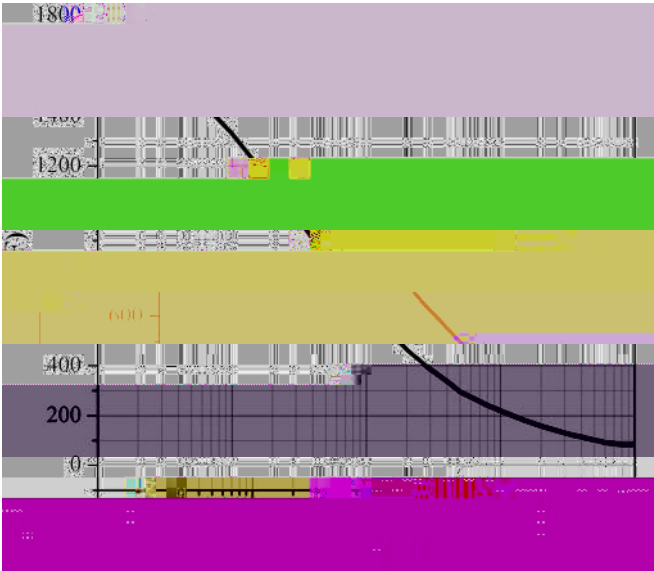


Figure 3. Capacitance vs. Reverse Voltage

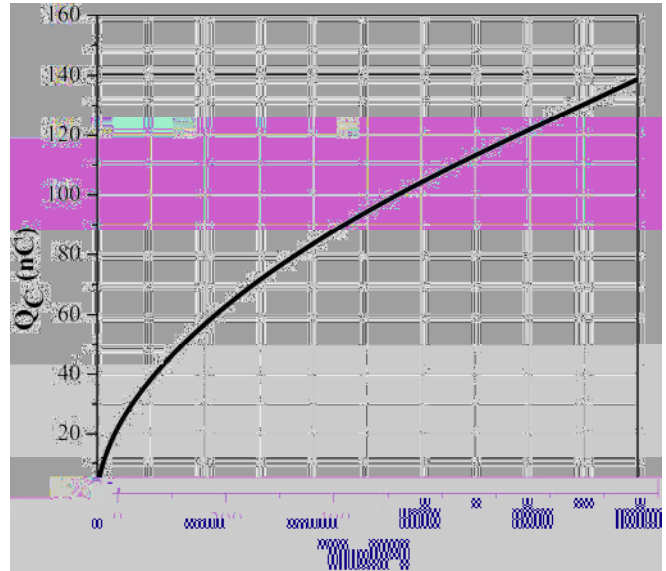


Figure 4. Total Capacitance Charge vs. Reverse Voltage

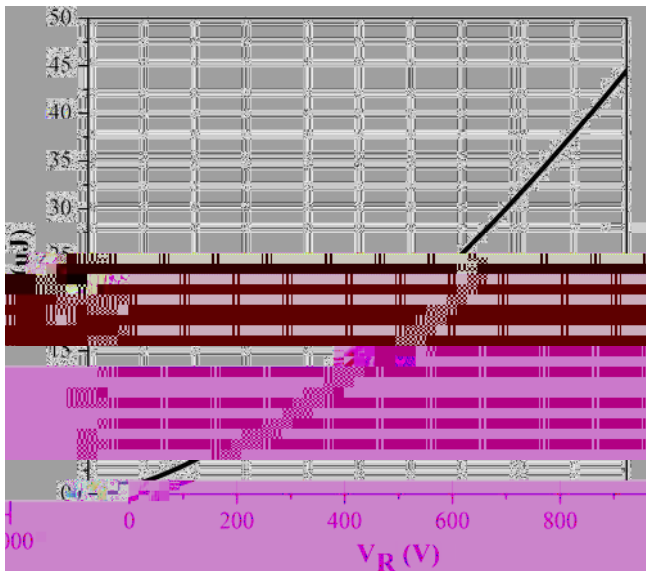


Figure 5. Capacitance Stored Energy

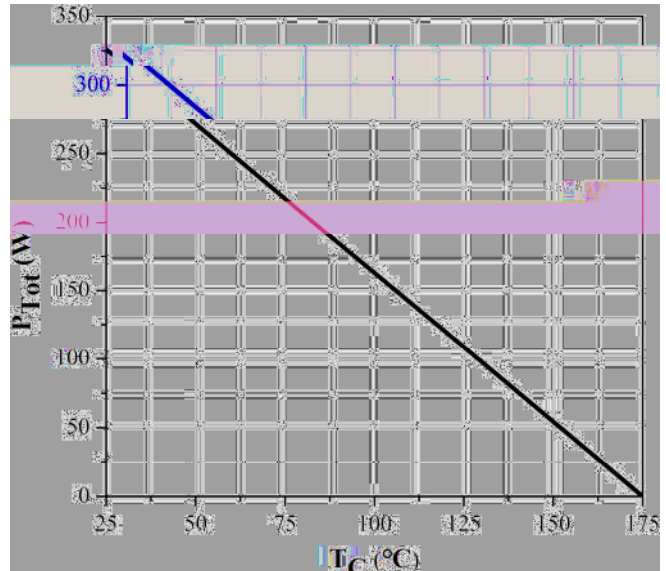


Figure 6. Power Derating

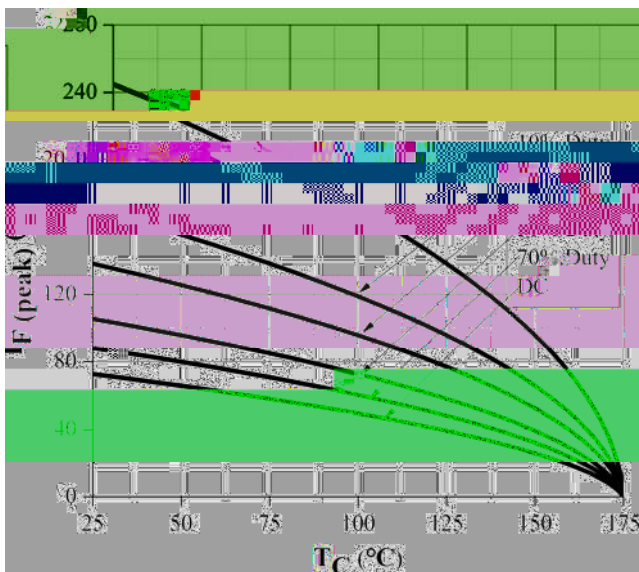


Figure 7. Current Derating

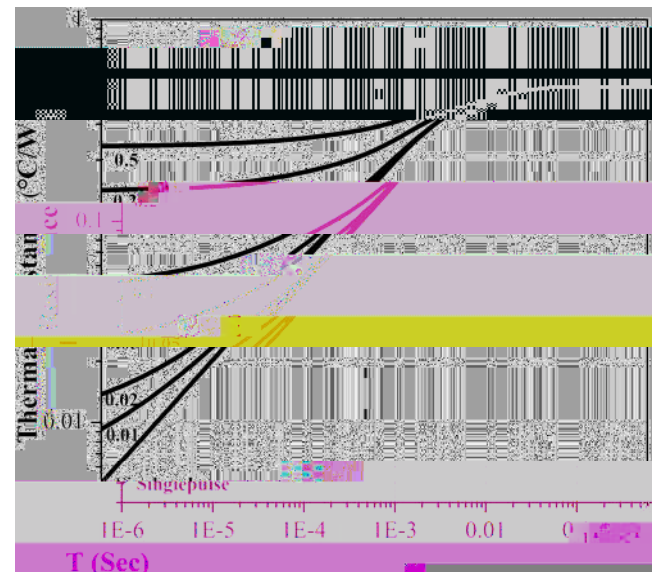


Figure 8. Transient Thermal Impedance





Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice. The information is not intended to constitute an offer or a contract.