


MMST5401

PNP General Purpose Amplifier

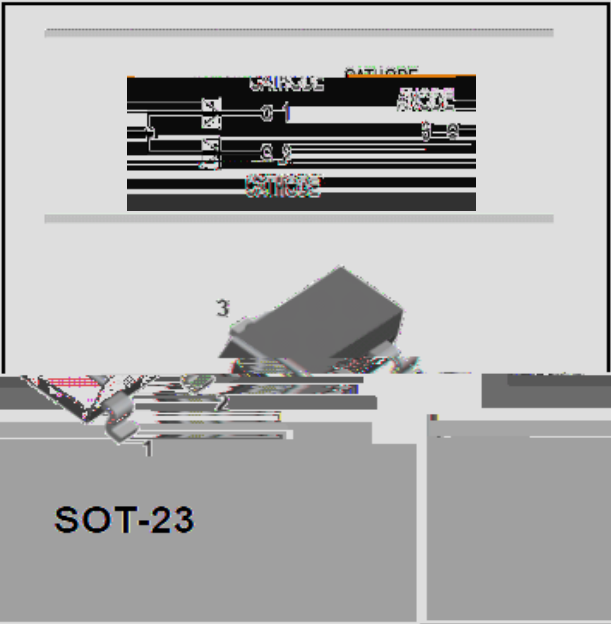

Features

Maximum Rantings


Item		Symbol		
				= 0-150
Collector-Base Voltage	V_{CB0}	V	$I_C = -100\mu A, f = 10\text{ kHz}$	-160
Emitter-Base Voltage	V_{EB0}	V	$I_E = -10\mu A, f = 10\text{ kHz}$	-5.0
Collector Current	I_C	mA		-600
Collector Power Dissipation	P_C	mW		200
Operation J unction Temperature	T_j			

v



MMST5401

Characteristics

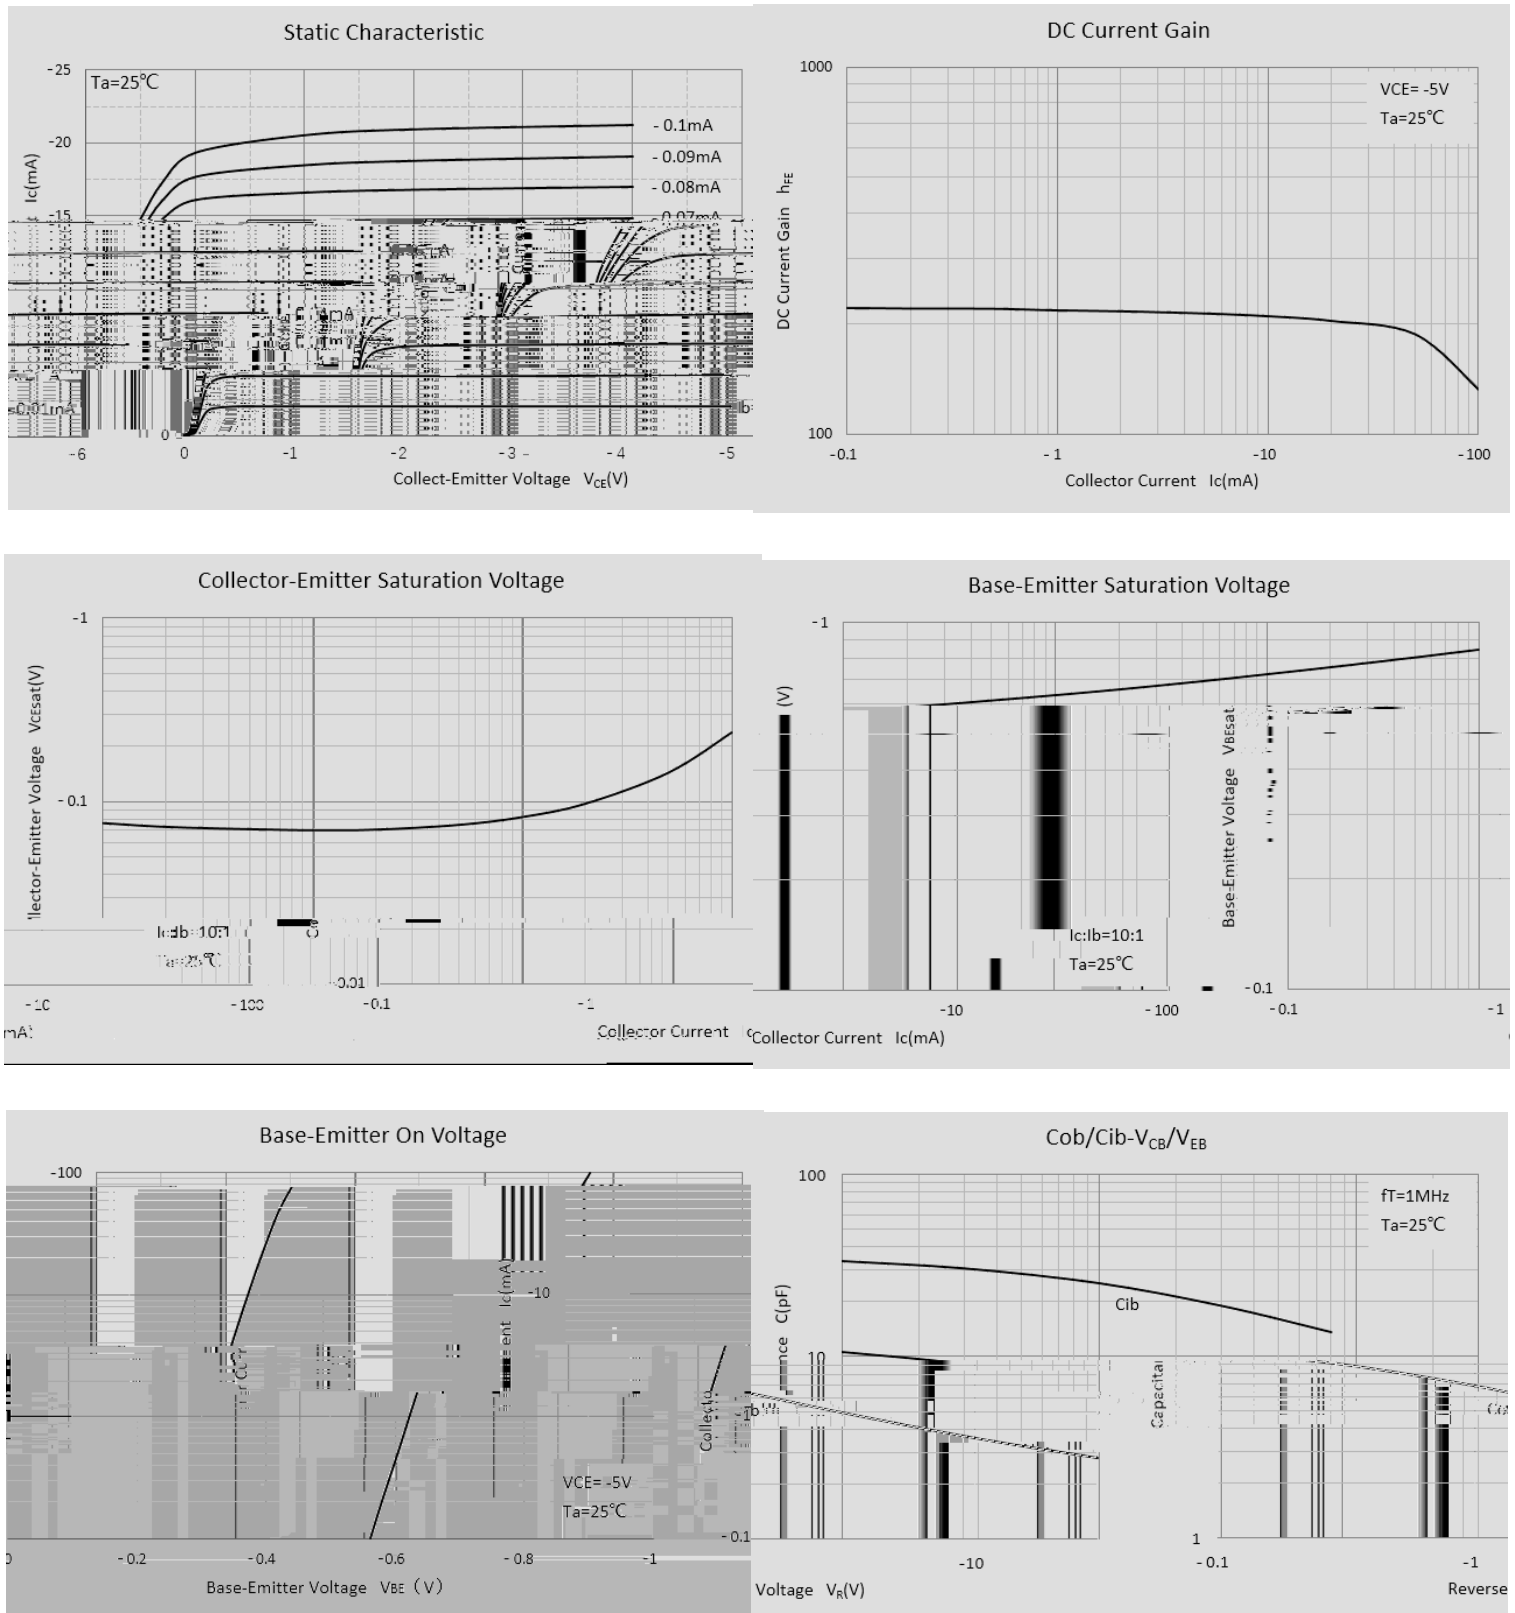



MMST5401

SOT-323 Package Outline Dimensions



DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.071	.087	1.80	2.20	
B	.025	.033	.64	.84	
C	.025	.033	.64	.84	
D	.026 Nominal		0.65 Nominal		
E	.047	.055	1.20	1.40	
F	.010	.012	.25	.30	
G	.010	.012	.25	.30	
H	.035	.059	.90	1.50	
J	.004	.010	.10	.25	
K	.005	.015	.13	.38	

■SOT-323 Soldering Footprint

