





High Efficient Rectifier

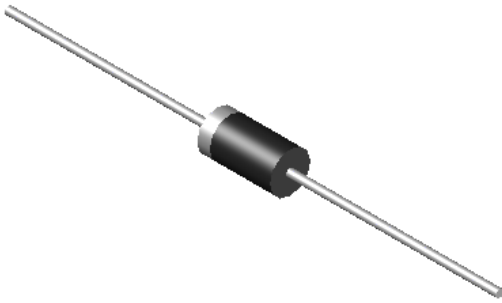

Features

- High efficiency
- High current capability
- High Reliability
- High surge current capability
- Glass passivated chip junction
- Solder dip 275 °C max. 7 s, per JESD 22-B106

Mechanical Data

- **Package:** DO-201AD(DO-27)
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** Color band denotes cathode end

Maximum Ratings (Ta=25 Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	HER501 G	HER502 G	HER503 G	HER504 G	HER505 G	HER506 G	HER507 G	HER508 G
Device marking code			HER501 G	HER502 G	HER503 G	HER504 G	HER505 G	HER506 G	HER507 G	HER508 G
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	V	50	100	200	300	400	600	800	1000
Maximum RMS Voltage	V _{RMS}	V	35	70	140	210	280	420	560	700
Maximum DC blocking Voltage	V _{DC}	V	50	100	200	300	400	600	800	1000
Average Forward Current @60Hz sine wave, Resistance load, Ta=50	I _{F(AV)}	A	5.0							
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave,1 cycle, Tj=25	I _{FSM}	A	150							
Forward Surge Current (Non-repetitive) @1ms, square wave, 1 cycle, Tj=25			300							
Current squared time @1ms≤t≤8.3ms Tj=25 Rating of per diode	I ² t	A ² s	94							
Typical junction capacitance @Measured at 1MHz and Applied Reverse Voltage of 4.0 V.D.C	Cj	pF	72			46		52		
Storage Temperature	T _{stg}		-55 ~ +150							
Junction Temperature	T _j		-55 ~ +150							

Electrical Characteristics Ta=25 Unless otherwise specified

PARAMETER	SYMBOL					HER503 G	HER504 G	HER505 G	HER506 G	HER507 G	HER508 G
Maximum instantaneous forward voltage drop per diode	V _F	V	I _{FM} =5.0A	1.0			1.3		1.7		
Maximum DC reverse current at rated DC blocking voltage per diode	I _R	μA	T _J =25	2.5							
			T _J =125	100							
Maximum reverse recovery time	t _{rr}	ns	I _F =0.5A, I _R =1.0A, I _r =0.25A	50					75		



HER501G THRU HER508G

■ Thermal Characteristics $T_a=25$ Unless otherwise specified


PARAMETER	SYMBOL	UNIT	HER501G	HER502G	HER503G	HER504G	HER505G	HER506G	HER507G	HER508G
Typical Thermal Resistance	$R_{\theta JA}$	/W	20							

■ Ordering Information (Example)

PREFERED P/N	PACKAGE CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
HER501G~HER508G	D1	Approximate 1.05	1250	1250	12500	Tape
HER501G~HER508G	C1	Approximate 1.05	250	250	12500	Bulk

■ Characteristics (Typical)


/

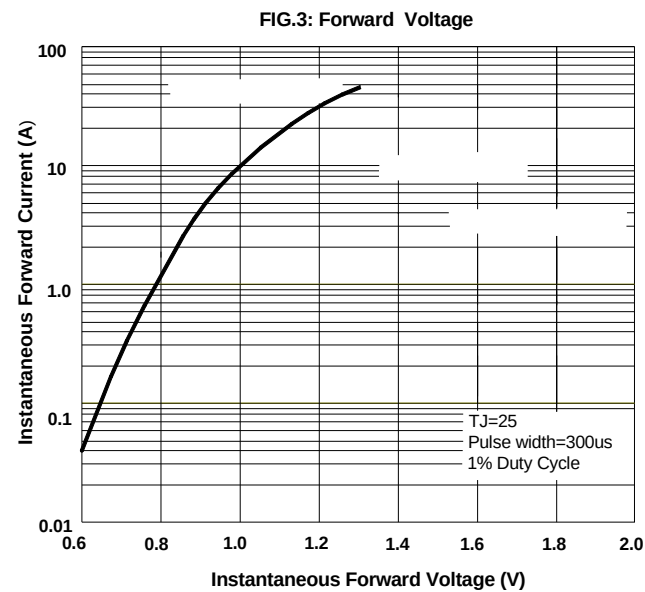




HER501G THRU HER508G

FIG.5: Diagram of circuit and Testing wave form of reverse recovery time

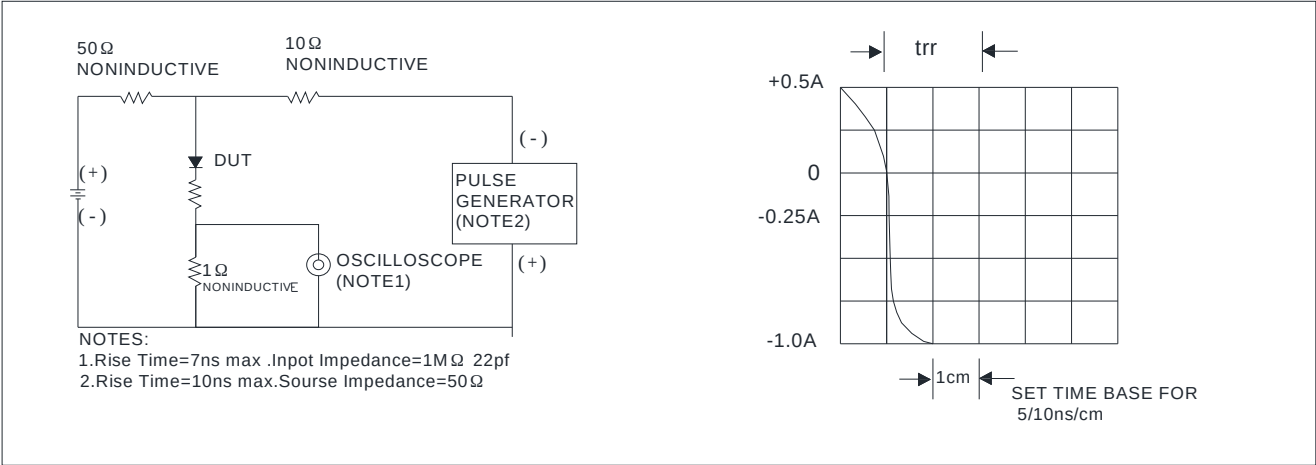

■ Outline Dimensions

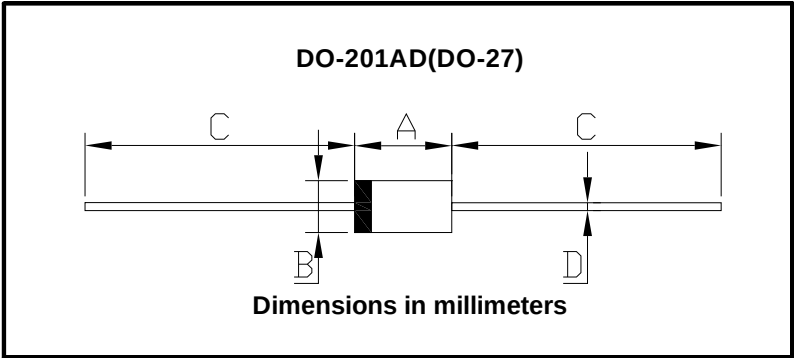

DO-201AD(DO-27)		
Dim	Min	Max
A	8.50	9.50
B	5.00	5.60
C	25.4	/
D	1.20	1.30



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or others. The product is not for use in safety-critical applications.