



Super Fast Recovery Rectifier Diode

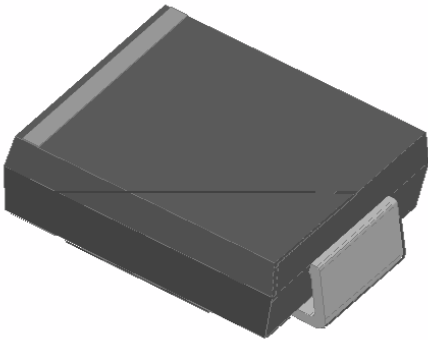

Features

- Ultrafast reverse recovery time
- Low leakage current
- Low switching losses, high efficiency
- High forward surge capability
- Solder dip 260°C max. 10 s, per JESD 22-B106

Typical Applications

For use in high frequency rectification and freewheeling application in switching mode converters and inverters for consumer, computer and telecommunication.

Mechanical Data

- Package: DO-214AB (SMC)
- Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free
- Terminals: Tin plated leads, solderable per J-STD-002 and JESD22-B102
- Polarity: Color band denotes the cathode end

■Maximum Ratings (T_a=25 Unless otherwise specified

PARAMETER	SYMBOL	UNIT	ES5A	ES5B	ES5C	ES5D	ES5F	ES5G	ES5H	ES5J
Device marking code			ES5A	ES5B	ES5C	ES5D	ES5F	ES5G	ES5H	ES5J

Forward Surge Current (Non-repetitive)	I_{FSM}	A	5.0							
--	-----------	---	-----	--	--	--	--	--	--	--

Junction Temperature	T _j		-55 ~ +150							
----------------------	----------------	--	------------	--	--	--	--	--	--	--

■Electrical Characteristics T_a=25 Unless otherwise specified

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	ES5A	ES5B	ES5C	ES5D	ES5F	ES5G	ES5H	ES5J
Maximum instantaneous forward voltage	V _F	V	IFM=5.0A	0.95				1.3		1.7	
Maximum reverse recovery time	t _{rr}	ns	IF=0.5A,IR=1.0A, I _{rr} =0.25A	35							
Maximum DC reverse current at rated DC blocking voltage	I _R	μA	T _J =25	5							
			T _J =125	100							
Typical junction capacitance	C _J	pF	Measured at 1MHz and Applied Reverse Voltage of 4.0 V.D.C	75				37		35	



ES5A THRU ES5J

■ Thermal Characteristics $T_a=25$ Unless otherwise specified

PARAMETER	SYMBOL	UNIT	ES5A	ES5B	ES5C	ES5D	ES5F	ES5G	ES5H	ES5J
Typical Thermal Resistance	$R_{\theta JA}^{(1)}$	/W	50							
	$R_{\theta JL}^{(1)}$		15							
	$R_{\theta JC}^{(1)}$		12							

Note(1)

Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.6" x 0.6" (16 mm x 16 mm) copper pad areas

■ Ordering Information (Example)

PREFERED P/N	PACKAGE CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
ES5A-ES5J	F1	Approximate 0.254	3000	/	42000	13" reel

■ Characteristics(Typical)



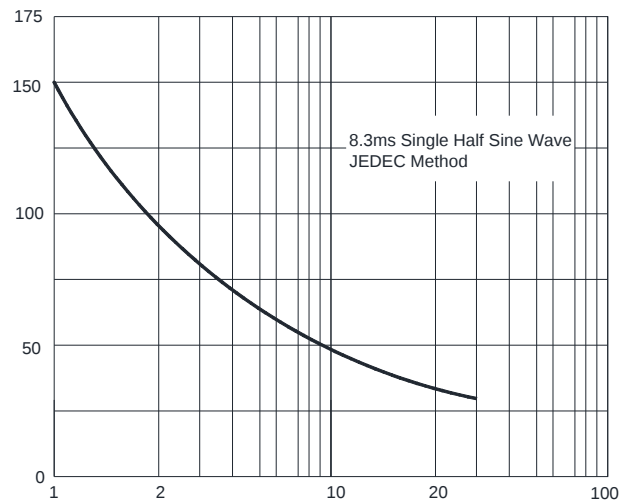


FIG.5: Diagram of circuit and Testing wave form of reverse recovery time

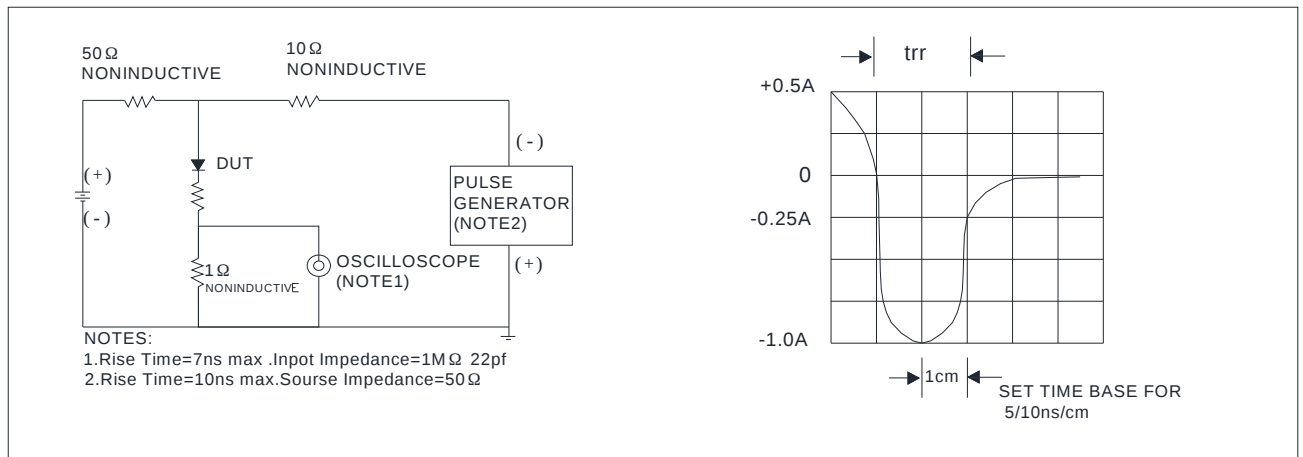


■ Outline Dimensions

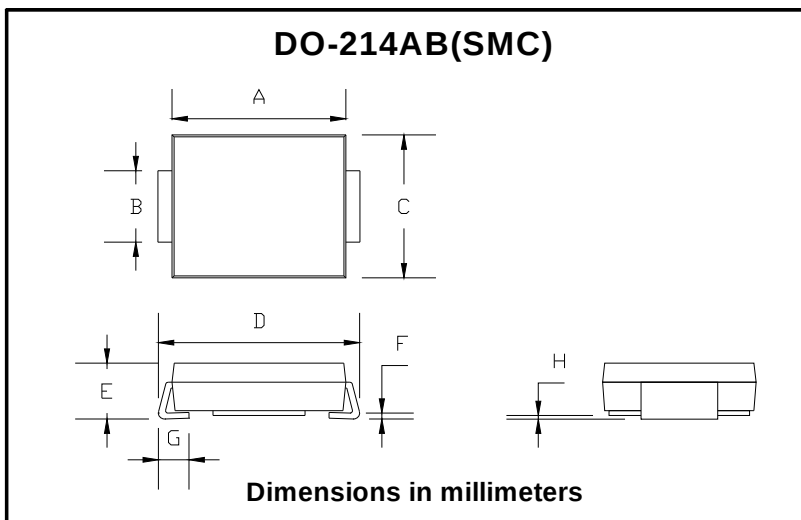

DO-214AB (SMC)		
Dim	Min	Max
A	6.60	7.11
B	2.85	3.27
C	5.59	6.22
D	7.75	8.13
E	1.99	2.61
F	0.15	0.31
G	0.76	1.52
H	0.05	0.20

■ Suggested pad layout

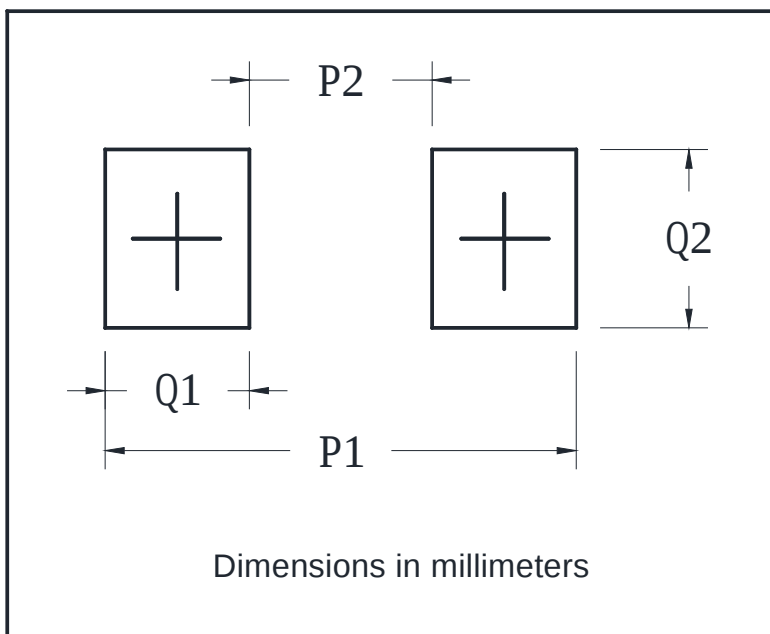

DO-214AB (SMC)	
Dim	Min
P1	9.9
P2	3.84
Q1	3.03
Q2	3.82



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety