



MBR20F60FCTS-B1-W5094HF

Schottky Diodes

" +LJK IUHTXHQF\ RSHUDWLRQ
 " +LJK SXULW\ KLJK WHPSHUDWXUH HSR[\ HQ
 HQKDQFHG PHFKDQJEDDP@PÀHQOWK6 FRPSO
 " Terminals 7LQ SODWHG OHDG

šš ß a M

Repetitive Peak Reverse Voltage	VRRM	V	60
Average Rectified Output Current 4 60H n sine wave ž R-load 1 90	,2	\$	
6XUJH 1RQ UHSHWLWLYH)RUZDUG &XUUHQW # +]K@LM - a			

--

0D[LPXP LQVWDQWDQHRXV IRUZDUG YROWDJH GURS SHU ⁹ GLRGH \$				
0D[LPXP ' & UHYHUVH 550UHQW DW UDWHG ' & EORFNLQJ YROWDJH	,550		950 9550 7D -	
SHU GLRGH	,550		950 9550 7D -	


1RWH 3XOVH WHVW X6 SXOVH ZLGK GXW\ F\FOH
 1RWH 3XOVH WHVW SXOVH ZLGK P6





MBR20F60FCTS-B1-W5094HF

Outline Dimensions

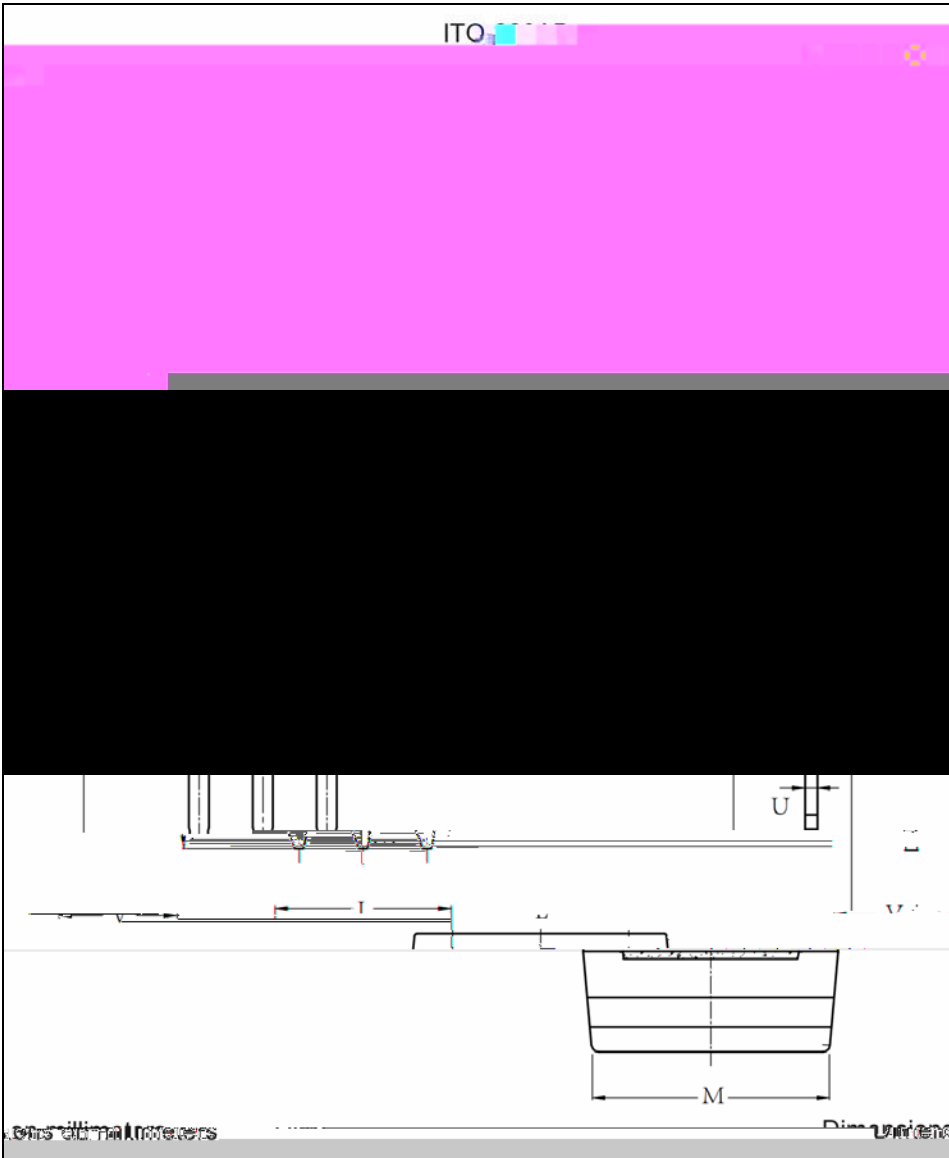

ITO-220AB		
'LP	0LQ	0D[
\$		
%		
&		
'		
(
)		
*		
+	7 < 3	
,	7 < 3	
-		
.		
/		
0		
1		
2	7 < 3	
3		
4		
5		
6	7 < 3	
7		
8		
9		



Disclaimer

7KH LQIRUPDWLRQ VSHFLDOLVHG LQ WKLV DOORDNLVH (HQRUPRUQ & R /VHG UHV
ULJKW WR PDNHWKRXVH LQVSHFIRU WSLRQG RFWV GLVSPDURIGHKHUOILDEWGLV L JQQ
RU RWKHUZLVH

7KH SURGXFWQLVGHV LQJHQ WR EHXWVWZLWK RHCXQSRHQW RU GHYLFHWKQG
HTXLSPHQW RU GHYLFHV ZKLFK UHTXLW KHKE DIOXZVWOLRQXIDIGGD E H W D K Q S D Q J H U
PHGLFDO LQVWUXHQWV WDWLRQHUTRXLSEPH QXFKLQDU UHDFWRIU FFRQWURROOHV DQ
GHYLFHV <DQJMLHVRV EHQHQH BQVXRLOV VARRWHO SRELVQLEWHVROVDLQ JGIDRPPMMFK LP
RI VDOH

7KLV SXEOLFDWLRQ VSHFLHUV DGDVLQURUPDVLROQLSGHYRURXVGLWLRQDO LQWRUPDWLR
KWV [VZ \DQJMLHVR](#) FRPRQVXOW \RXU QHDUHVW <DQJMLHVRVDFHOHV RILFH IRU IXUW