


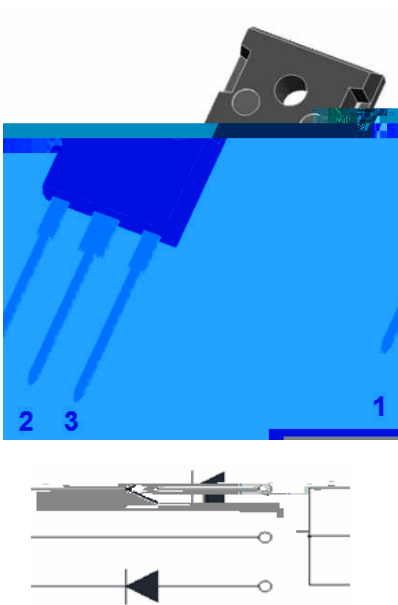

Typical Applications

Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

Mechanical Data

- Package:** TO-247AB
 Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- VRRM V

Average Rectified Output Current at 25°C		Tstg	6 UNIT
--	--	------	--------

			TEST CONDITIONS	Min	Typ	Max
Peak Forward Voltage	V _{FM}	V	I _{FM} =15.0A T _j =25	0.5	0.77	0.8
			I _{FM} =15.0A T _j =125	-	0.66	0.7
DC reverse current at rated DC blocking voltage per diode	I _{RRM1}	mA	V _{RM} =V _{RRM} T _j =25	-	-	0.05
	I _{RRM2}		V _{RM} =V _{RRM} T _j =125	-	-	50
Junction capacitance	C _j	pF	1MHZ and Applied Reverse Voltage of 4.0 V.D.C.	200	390	600

Note1:Pulse test:300uS pulse width,1% duty cycle

Note2:Pulse test:pulse width 40mS



MBR30100PT

■ Thermal Characteristics $T_a=25$ Unless otherwise specified

PARAMETER		SYMBOL	UNIT	MBR30100PT
Thermal Resistance	Between junction and ambient	$R_{\theta J-A}$	$^{\circ}W$	50.0
	Between junction and case	$R_{\theta J-C}$	$^{\circ}W$	1.0

■ Characteristics (Typical)

FIG3: Forward Voltage

