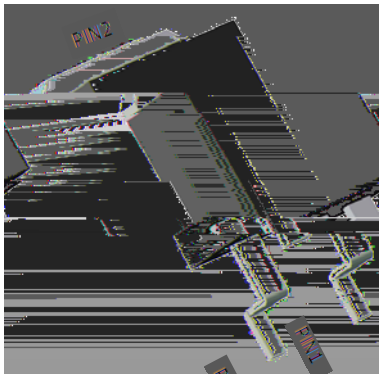


Typical Applications

Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

Mechanical Data

- **Package:** TO-263
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked

Maximum Ratings (Ta=25 Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	MBRBL10100CT
Device marking code			MBRBL10100CT
Repetitive Peak Reverse Voltage	V _{RRM}	V	100
Average Rectified Output Current @60Hz sine wave, R-load, Tc=114	FSM	A	100
Current Squared Time @1ms≤t≤8.3ms Tj=25	I ² t	A ² s	41
Storage Temperature	T _{stg}		-55 ~ +150
Junction Temperature	Tj		-55 ~ +150

Electrical Characteristics (Ta=25 Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	MBRBL10100CT
Maximum instantaneous forward voltage drop per diode	V _{FM}	V	I _{FM} =5.0A	0.72
Maximum DC reverse current at rated DC blocking voltage per diode	I _{RRM1}	mA	V _{RM} =V _{RRM} Ta=25	0.1
	I _{RRM2}		V _{RM} =V _{RRM} Ta=100	20

Note1:Pulse test:300uS pulse widh,1% duty cycle

Note2:Pulse test:pulse widh 40mS

- Guard ring for enhanced ruggedness and long term reliability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260



MBRBL10100CT

■Thermal Characteristics (T_a=25 Unless otherwise specified)

PARAMETER		SYMBOL	UNIT	MBRBL10100CT
Thermal Resistance	Between junction and case	R _{θJ-C}	/W	2.0

■Ordering Information (Example)

PREFERED P/N	UNIT WEIGHT(g)	MINIIMUM
--------------	----------------	----------






MBRBL10100CT

■Outline Dimensions

TO-263		
Dim	Min	Max
A	9.5	11.5
B	9.7	10.5
C	8.4	9.0
D	0.28	0.64
E	0.68	0.94
F	4.55	5.6
G	4.04	5.10
H	1.14	1.4
I	0	0.2
J	4.9	6.05
K	1.79	2.79
L	7.3	7.9
M	6.2	6.8
N	7.6	8.2

■Suggested Pad Layout



Dim	Millimeters
A	12.7
B	9.4
C	16.6
P	5.08

