



Typical Applications

Mechanical Data

Package

Terminals

Polarity

Maximum Ratings

V R T M

	V _{RRM}	V	100
Repetitive Peak Reverse Voltage	V _{RRM}	V	100
Average Rectified Output Current 4 60Hz sine wave ě R-load ě Tc 1 -)			

Electrical Characteristics

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	MBRU40100CT



MBRU40100CT

Thermal Characteristics


PARAMETER	SYMBOL	UNIT	MBRU40100CT

Ordering Information

PREFERED P/N	UNIT WEIGHT(g)	MINIIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE



Outline Dimensions

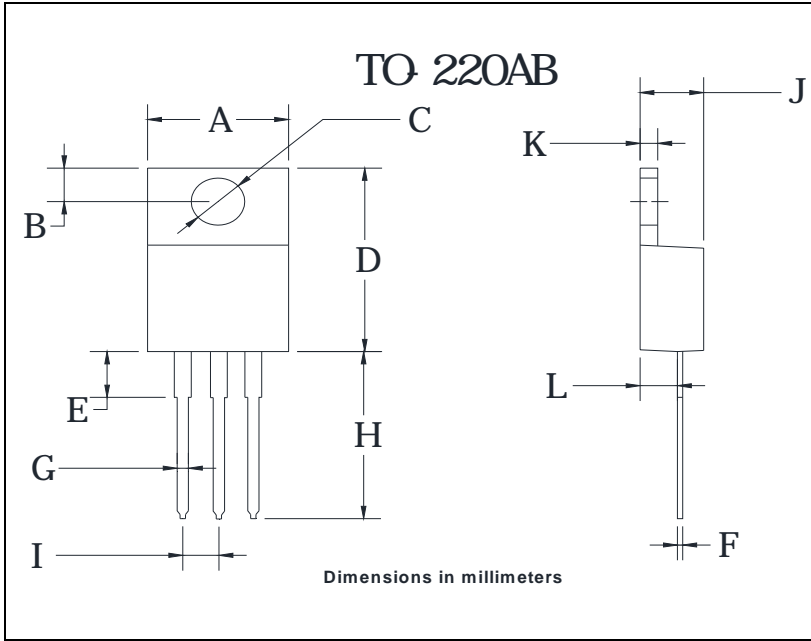

TO-220AB		



Disclaimer
